


Acc 183

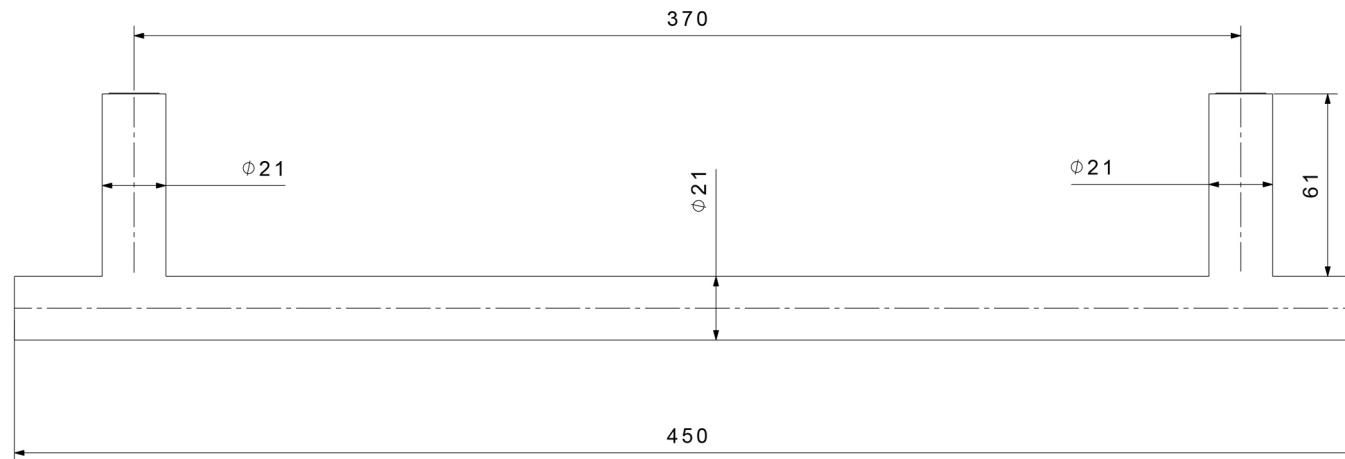

Acc 183

Towel rail

QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving





Product that needs built-in part

MAINTENANCE

DO NOT USE	  	cloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

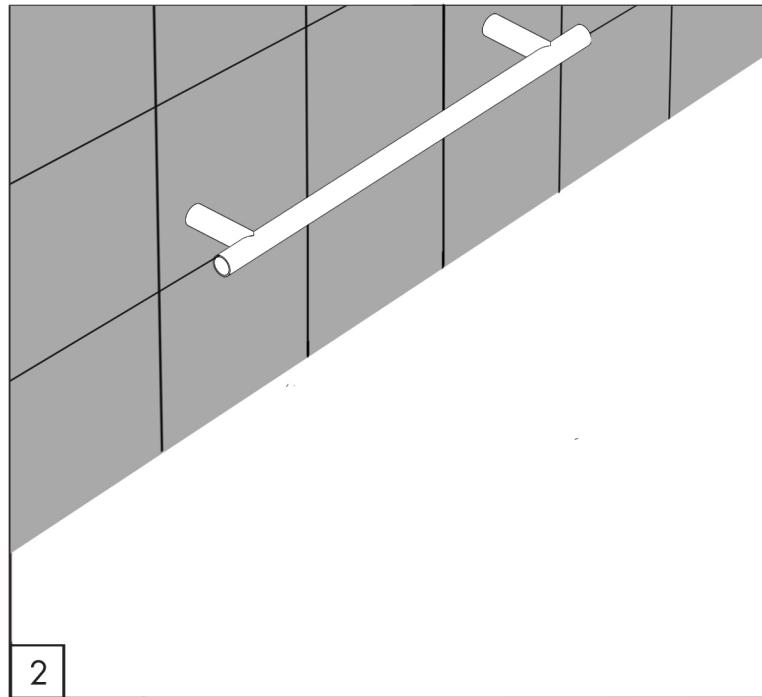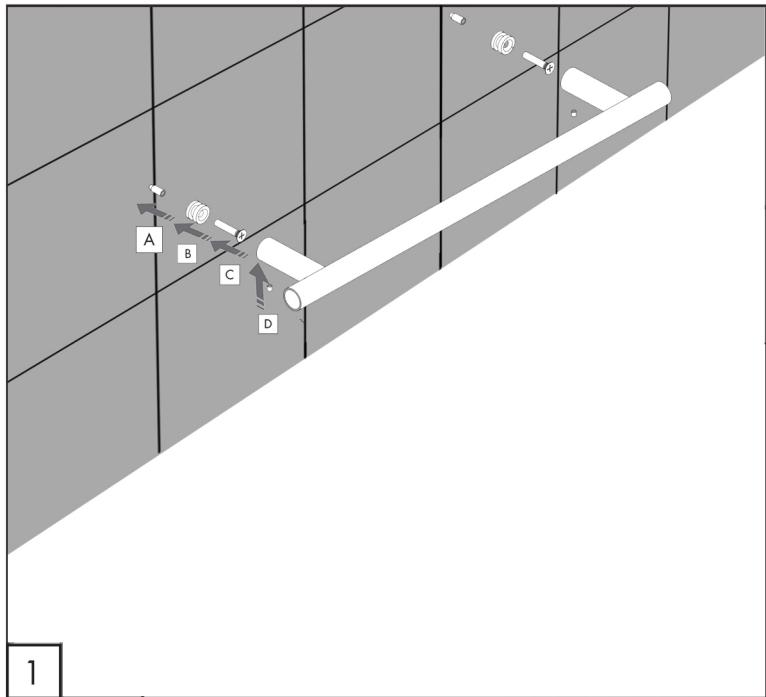

Acc 183

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

qooop