




Alm 01

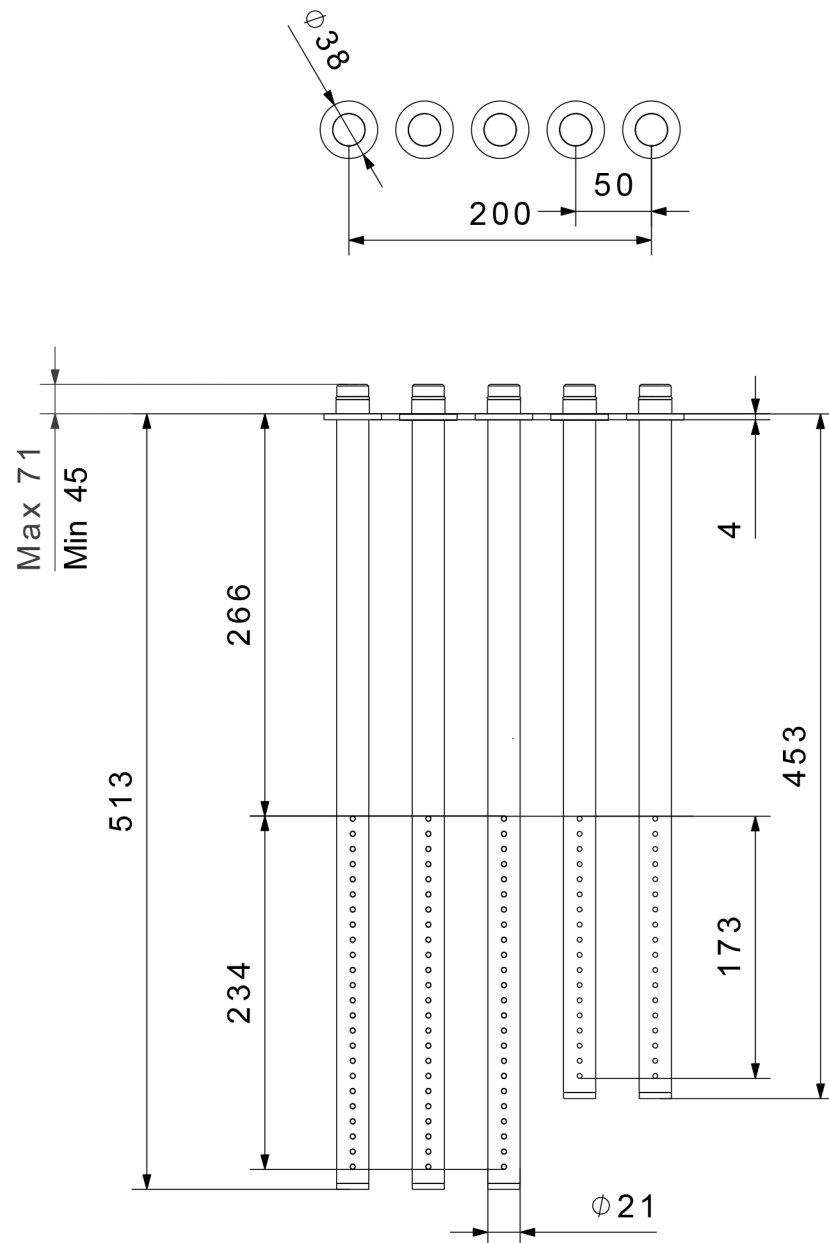

Alm 01

Stainless Steel 316 L

Shower head



Flow rate aerator 5 l/min / 1.3 gpm, water saving


MAINTENANCE

DO NOT USE		chloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent



2030

+ Ma 148
H (mm)

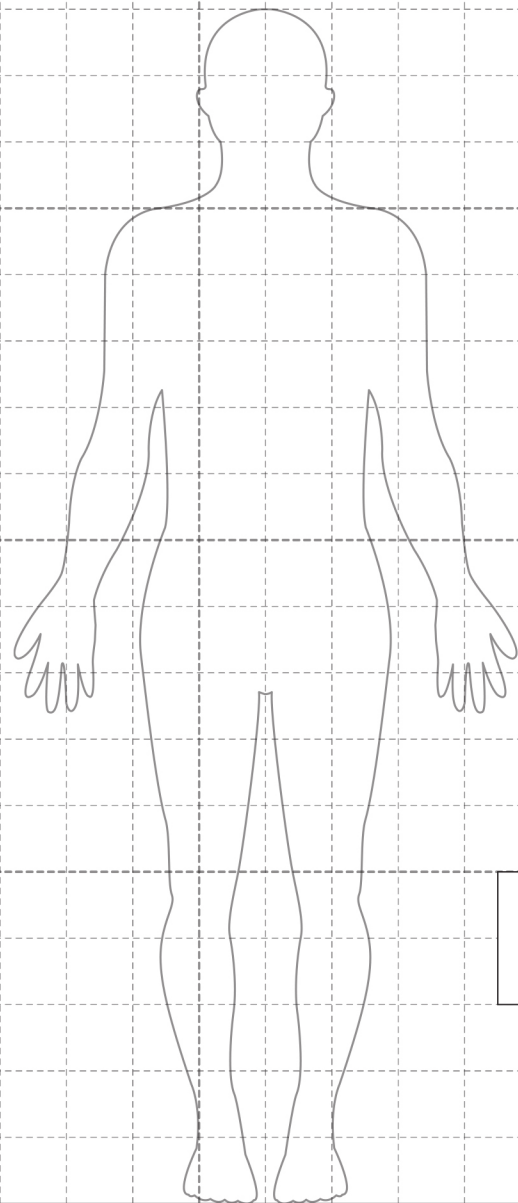

5 l/min



100 mm

Alm 01

INSTALLATION WARNINGS

Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.

AERATOR INCLUDED



Mounted aerator
5 l/min / 1.3 gpm

AERATORS ON DEMAND







Compliant with LEED standards
1,9 l/min / 0.5 gpm



Compliant with LEED standards
3,8 l/min / 1 gpm



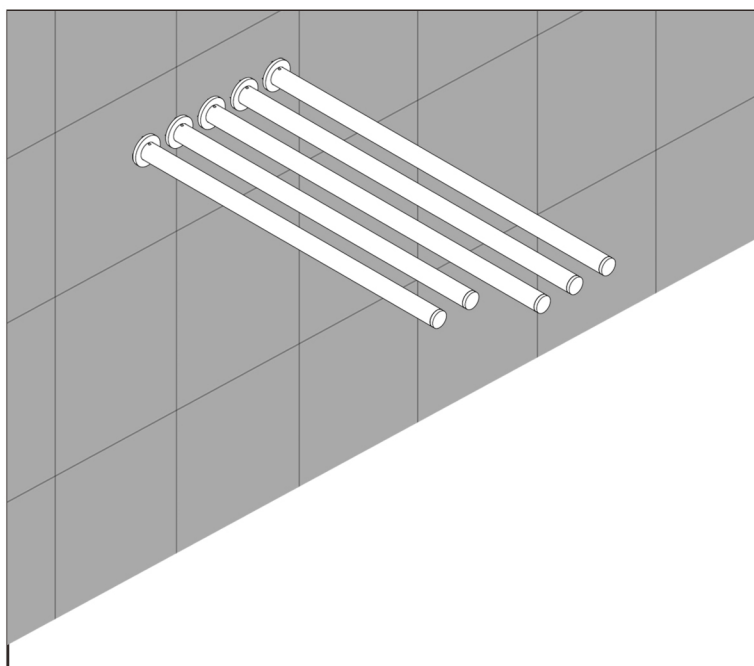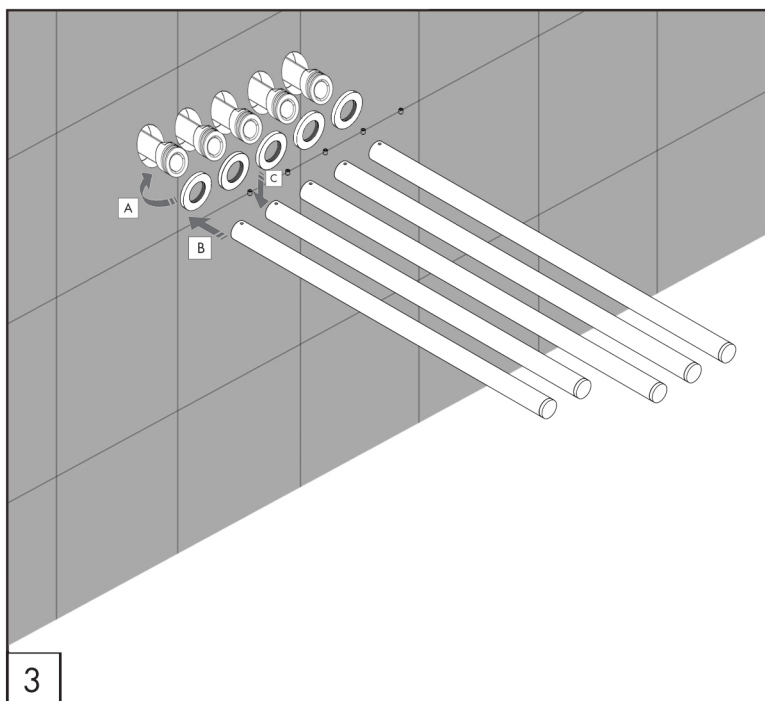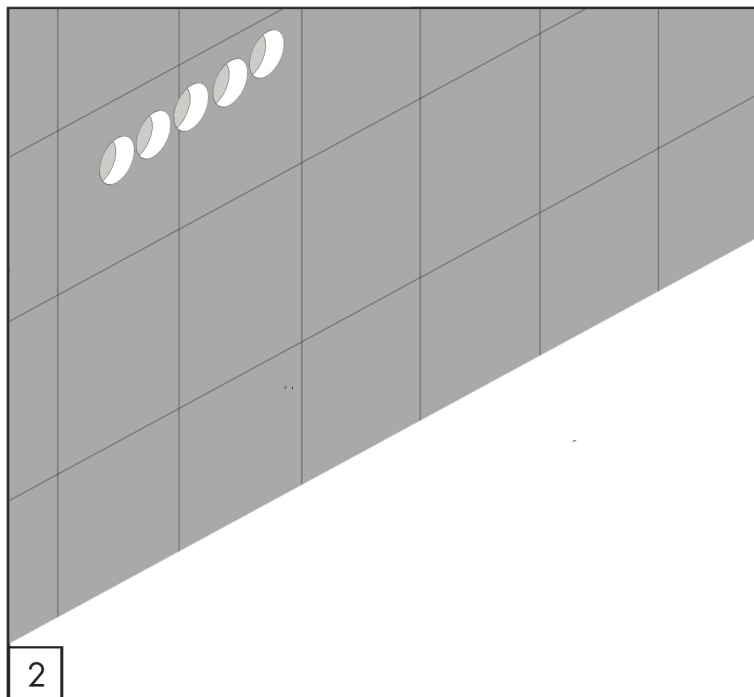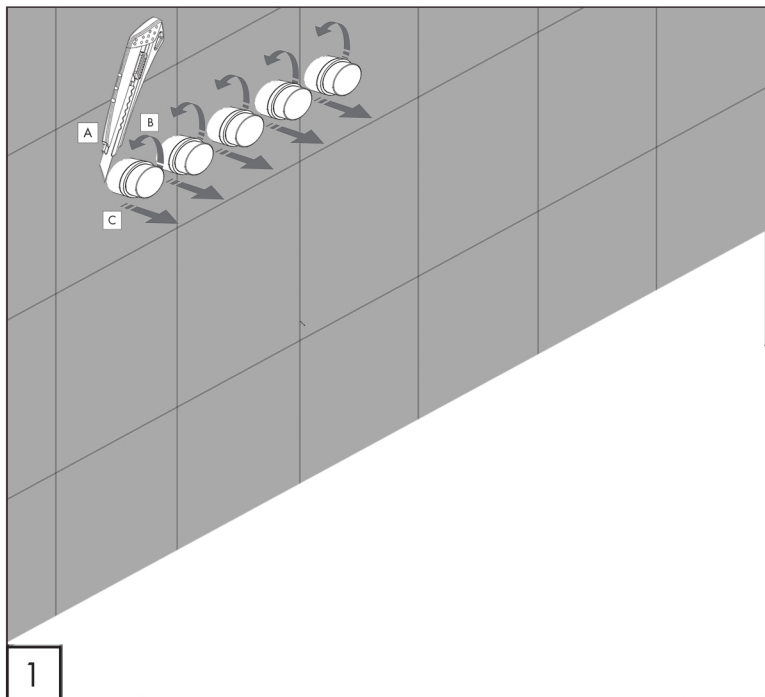

Alm 01

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
 Avoid pressure differences between hot and cold water supply.
 Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

WORKING TEMPERATURE

 max. 70 °C
 max. 158 °F

