
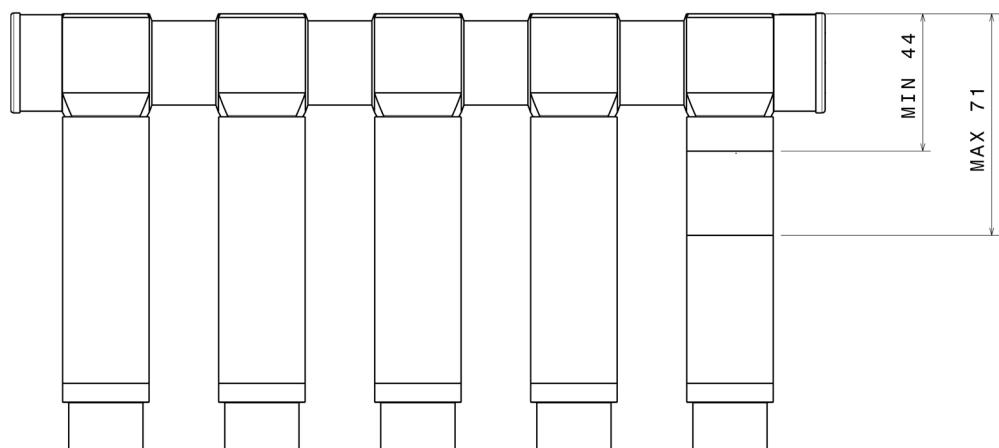


Ma 148

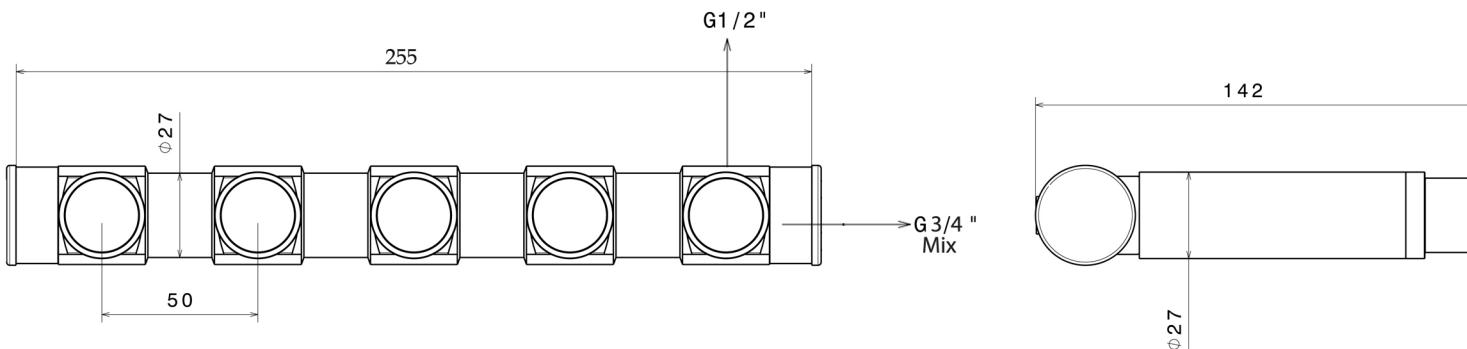

Ma 148

Stainless Steel 304 L

Internal part for shower head



Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENANCE




DO NOT USE	  	chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

oopop

Ma 148

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation. Avoid pressure differences between hot and cold water supply. Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

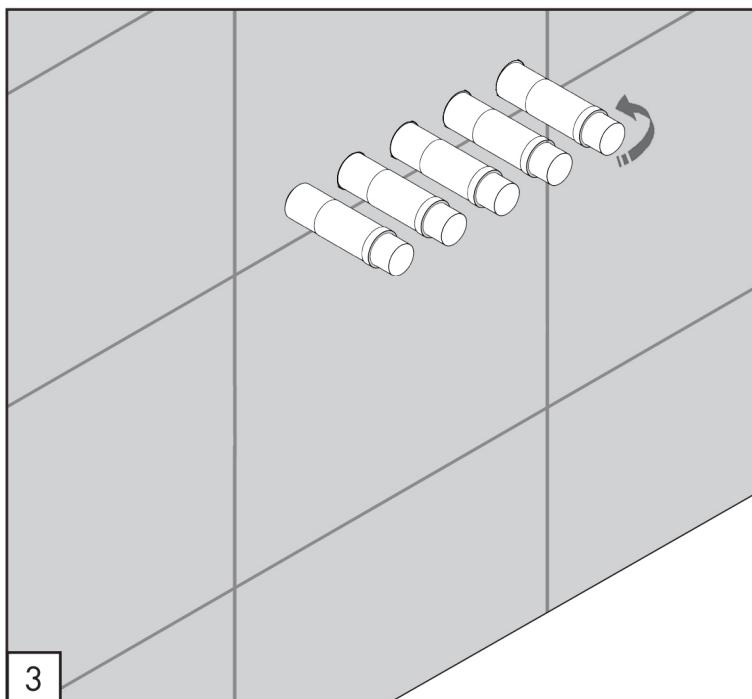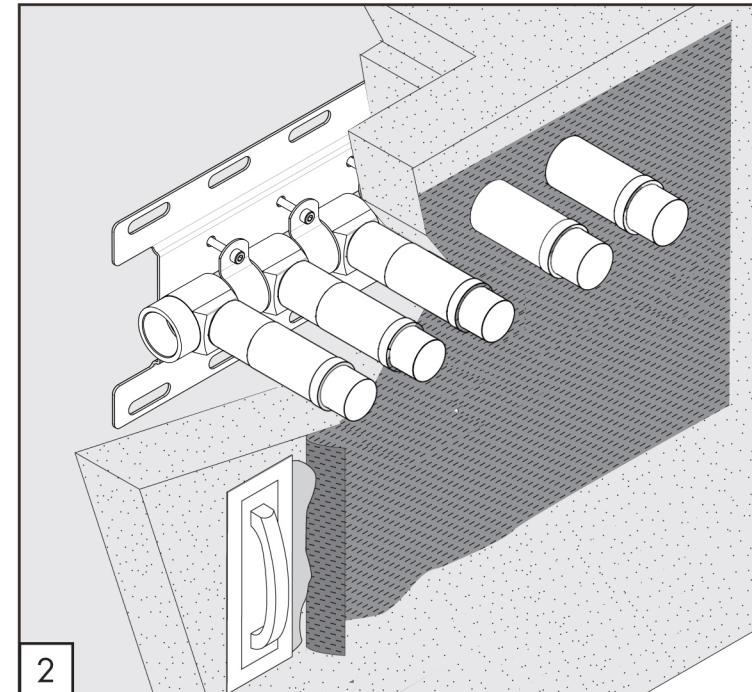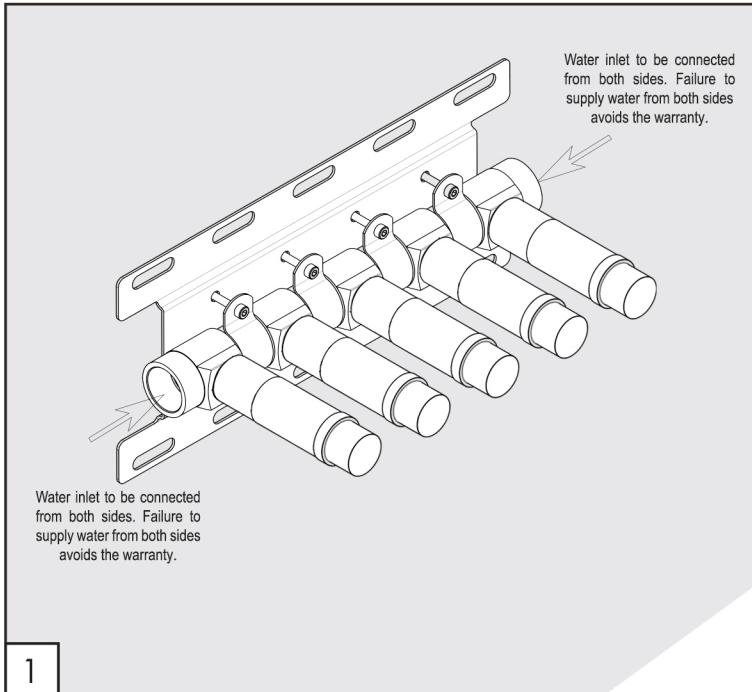

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

qooop