




Perlador M24

Alm 05-50cm

Alm 05
Stainless Steel 316 L

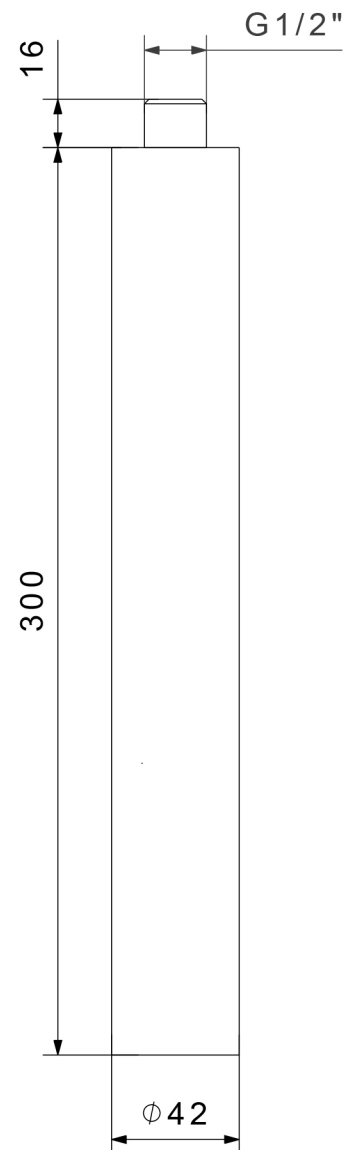

Rain shower head

- Requires Built in part
- Included Built in part



Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENANCE


DO NOT USE		cloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent



H (mm)

3000

100 mm

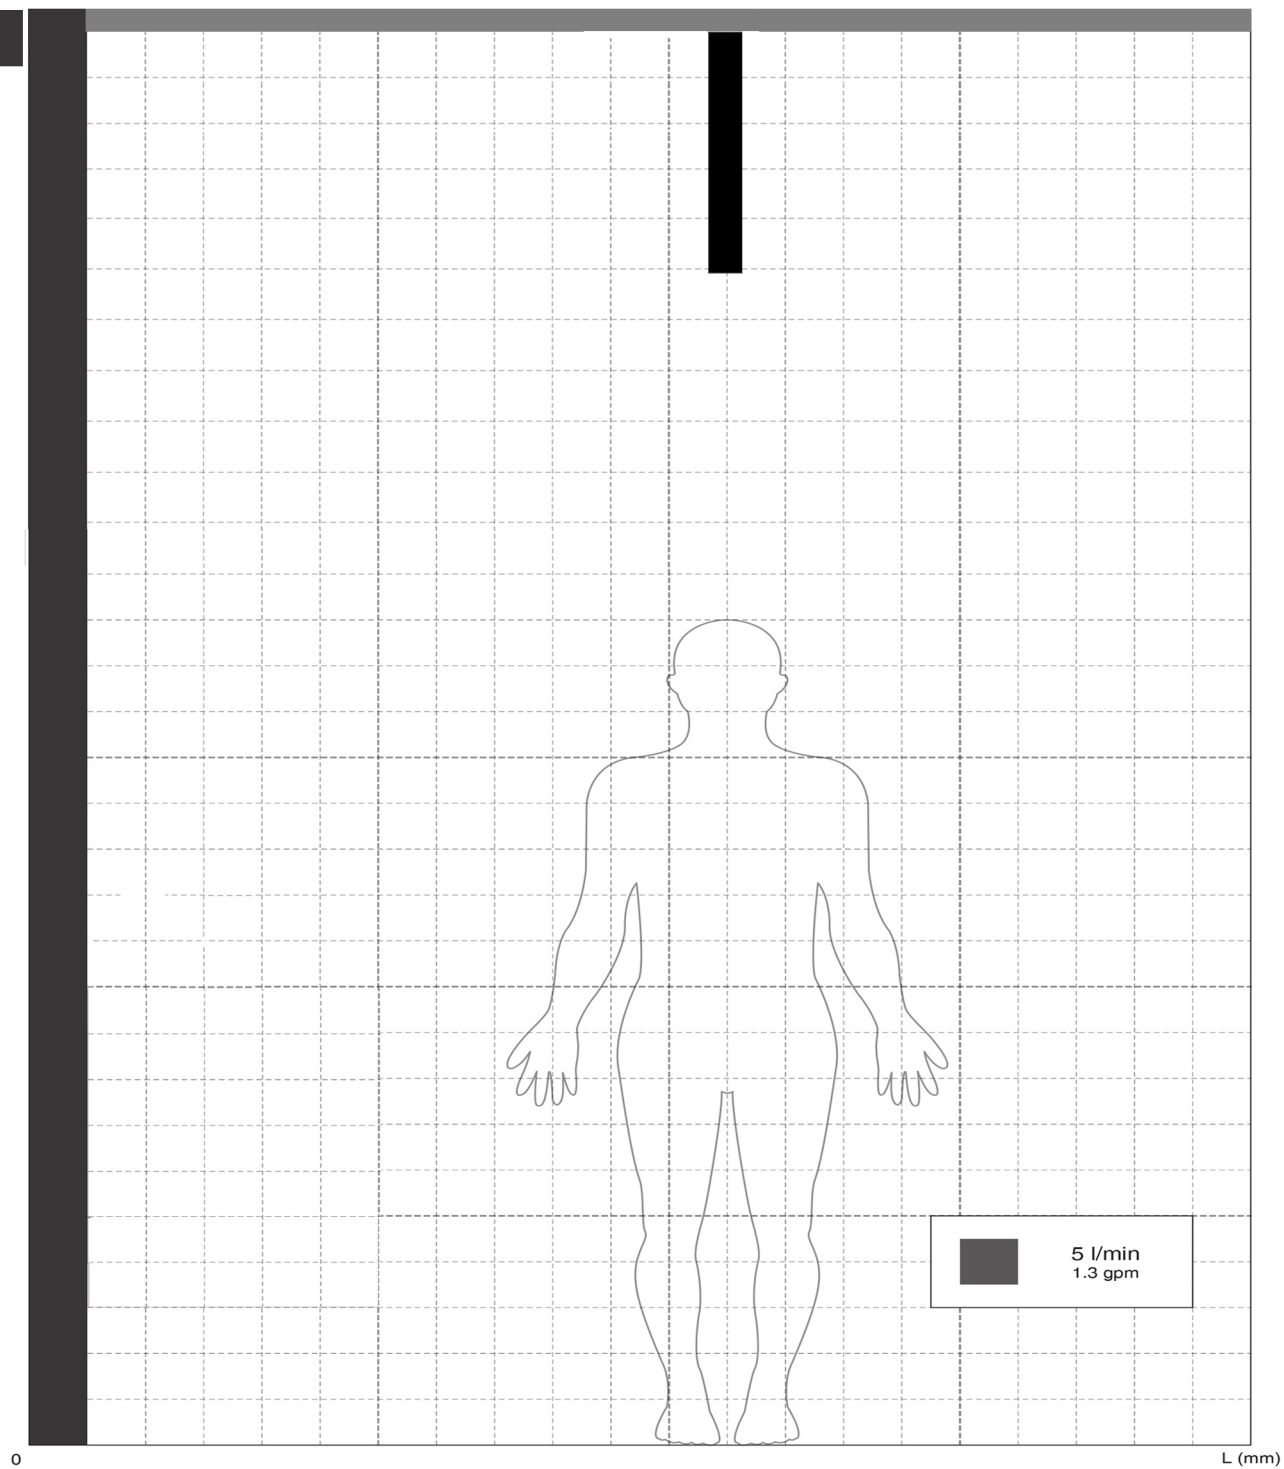

Alm05-50cm

INSTALLATION WARNINGS

Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.

AERATOR INCLUDED

 **Mounted aerator**
5 l/min / 1.3 gpm



AERATORS ON DEMAND

 **Compliant with LEED standards**
1,9 l/min / 0.5 gpm

 **Compliant with LEED standards**
3,8 l/min / 1 gpm



Alm05-50cm

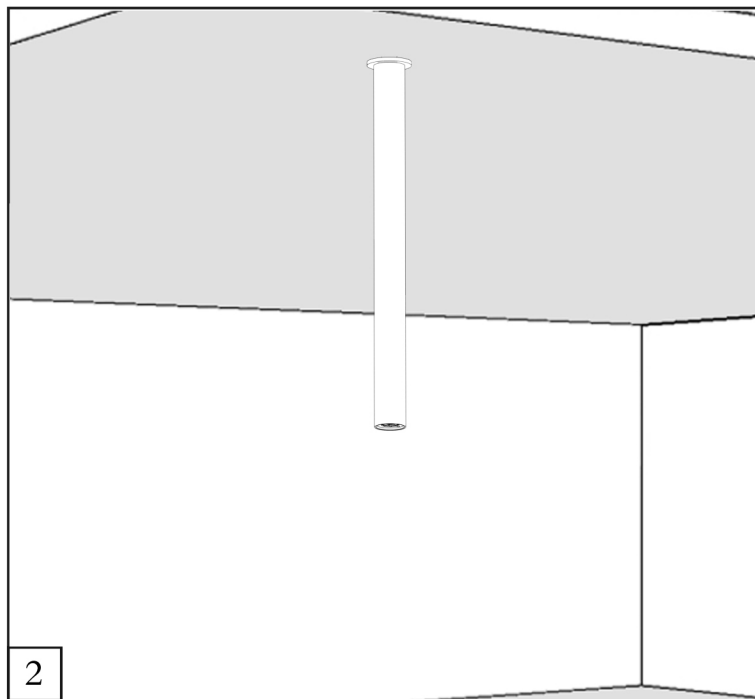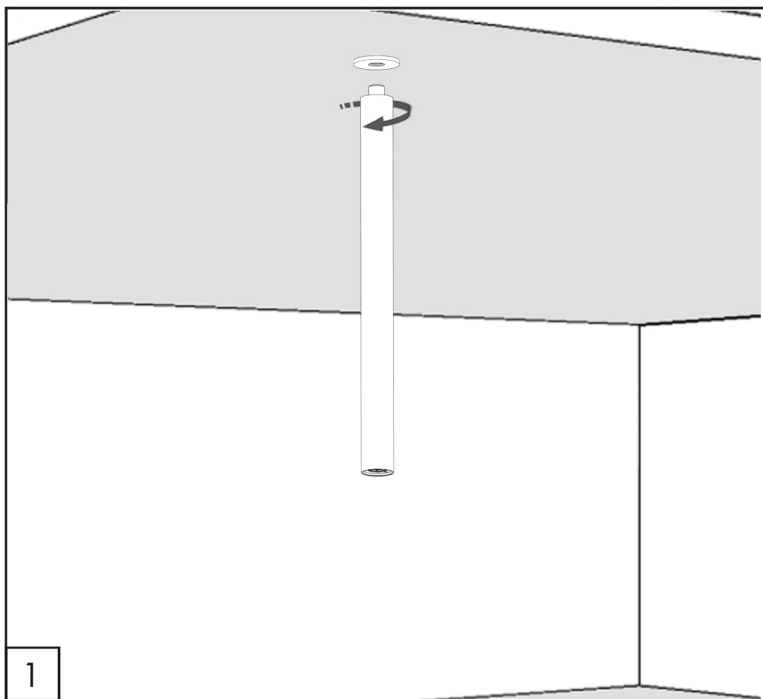

WORKING TEMPERATURE

 max. 70 °C
max. 158 °F

