


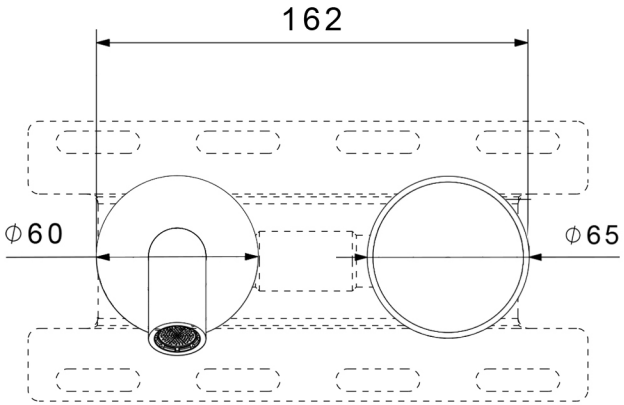


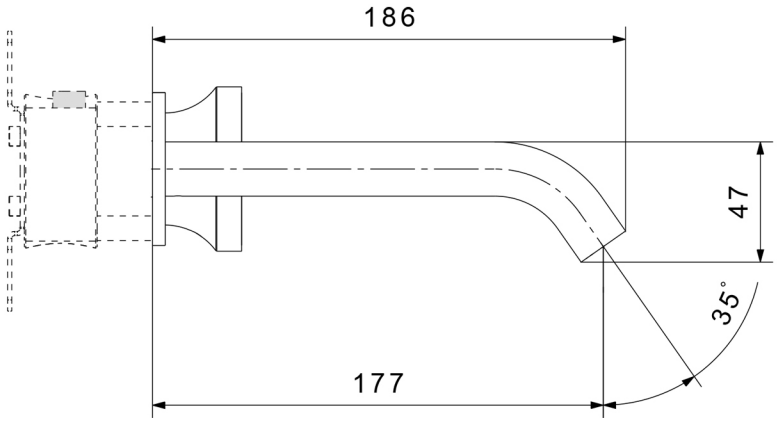

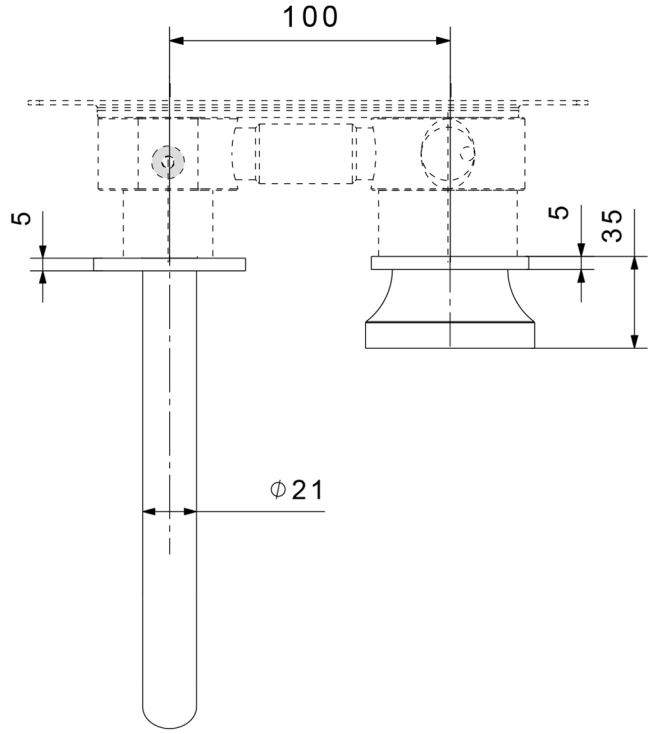

Frm 05

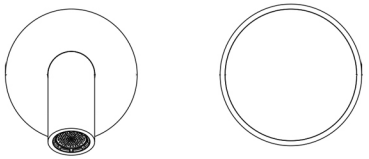

Frm 05

Wall mounted basin mixer -42

QOOP

Stainless steel 316L


Flow rate aerator 5 l/min / 1.3 gpm, water saving

Product that needs built-in part

MAINTENANCE

DO NOT USE	HCl	*cloric and muriatic acid*
	HF	*hydrofluoric acid*
	NaClO	*chlorine bleach*
TO USE	pH 7	*neutral pH detergent*

Frm 05

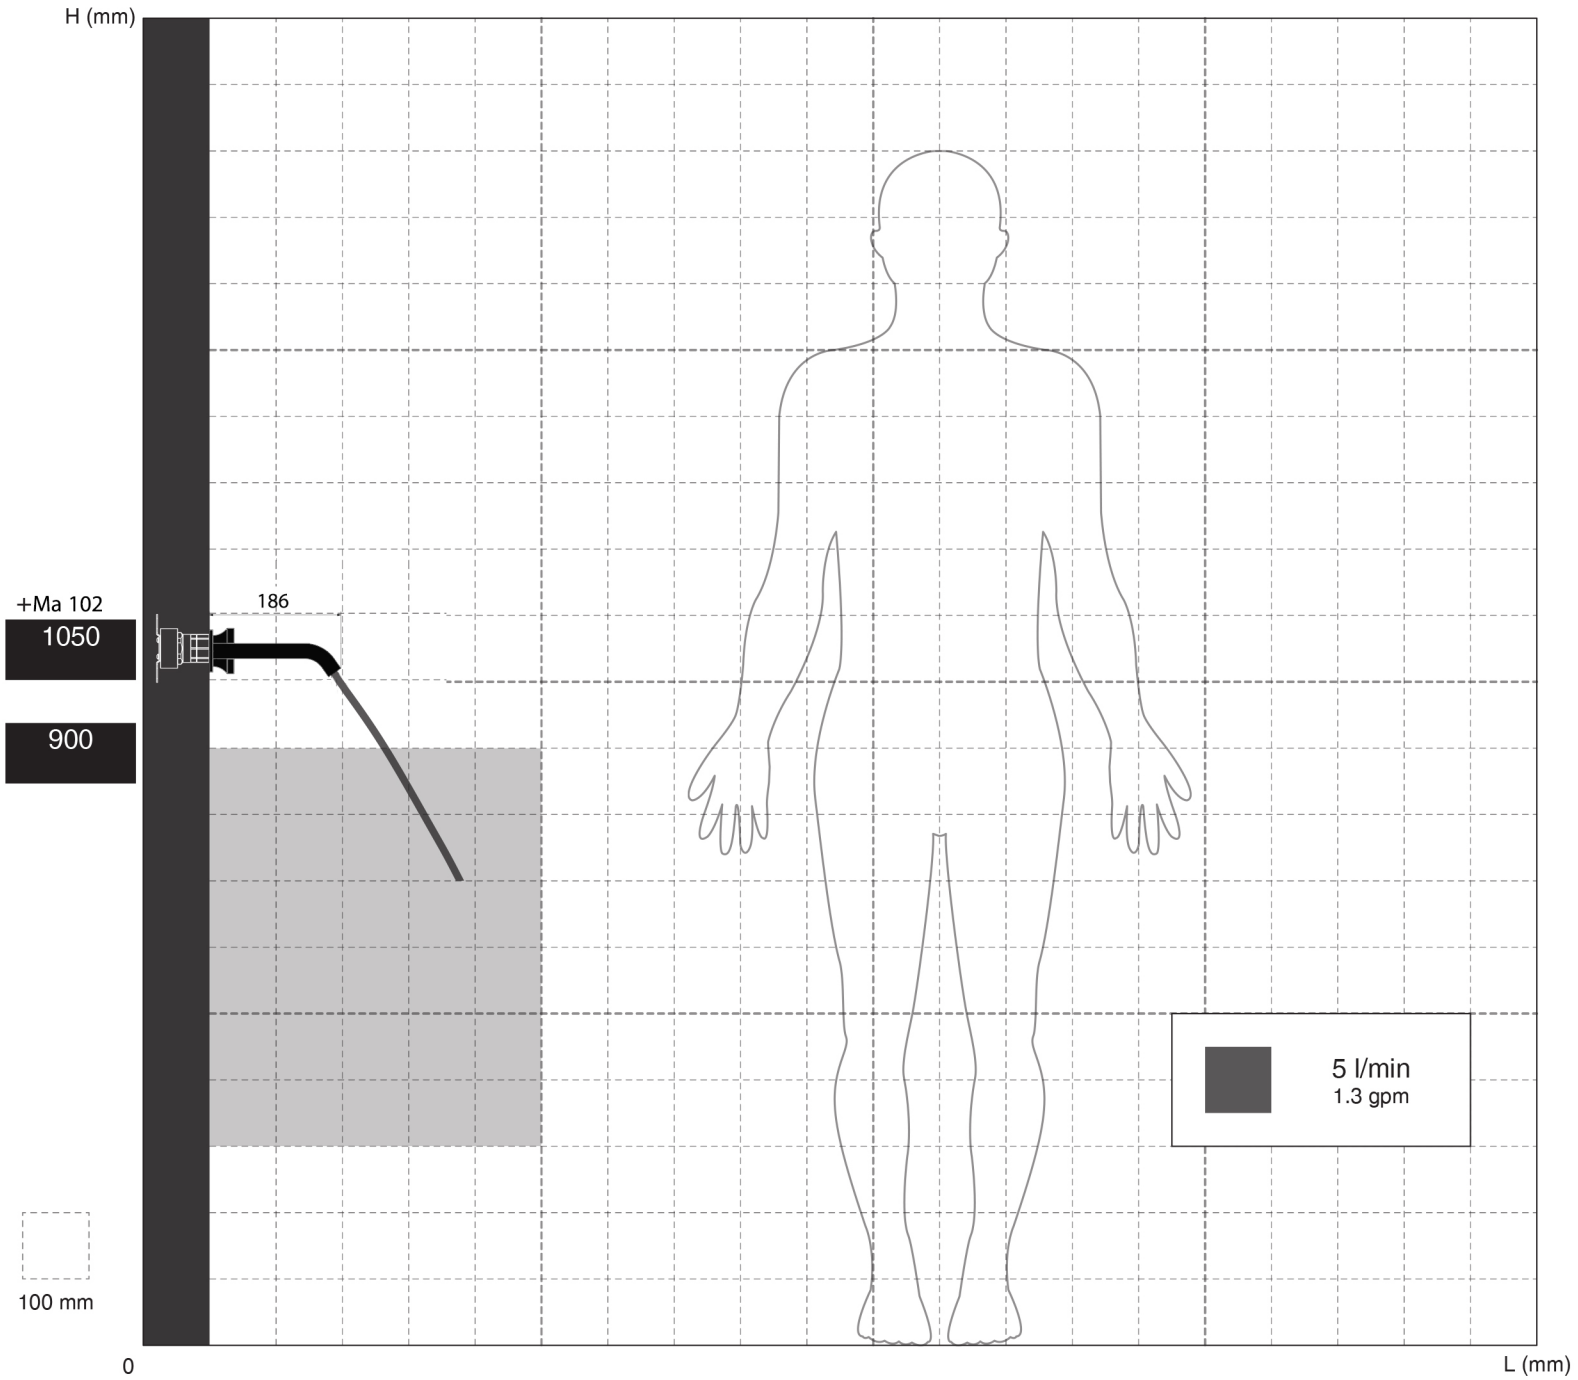



INSTALLATION WARNINGS


Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.


AERATOR INCLUDED

Mounted aerator
5 l/min / *1.3 gpm*

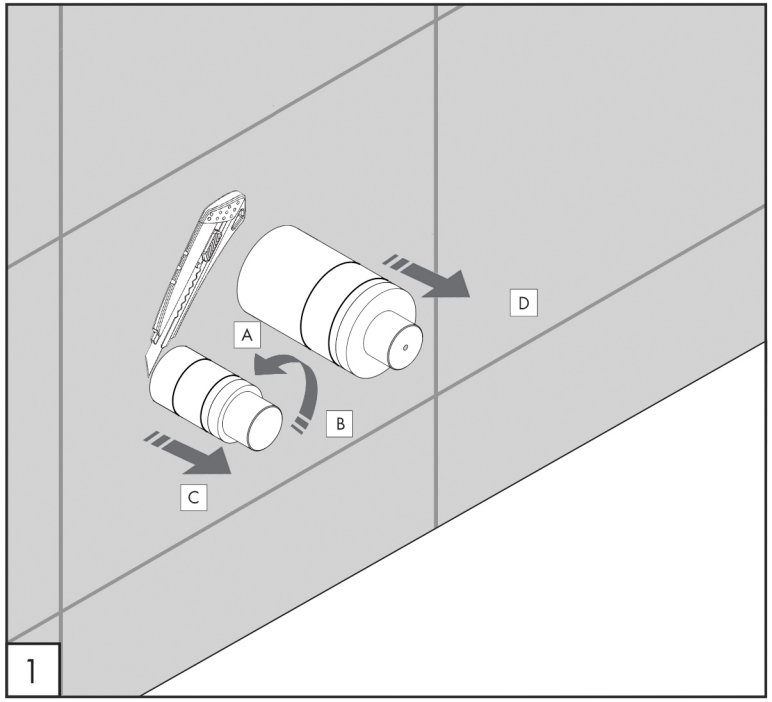

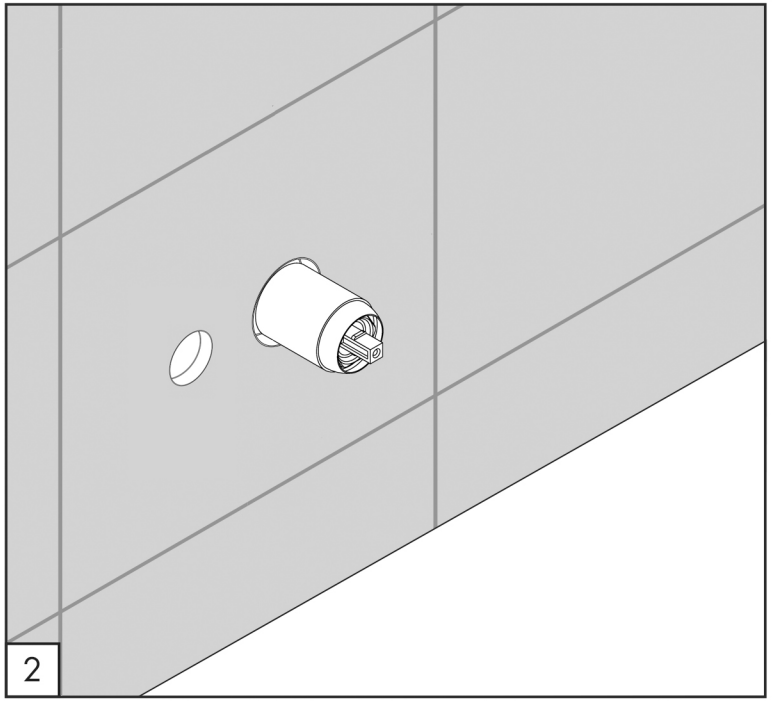

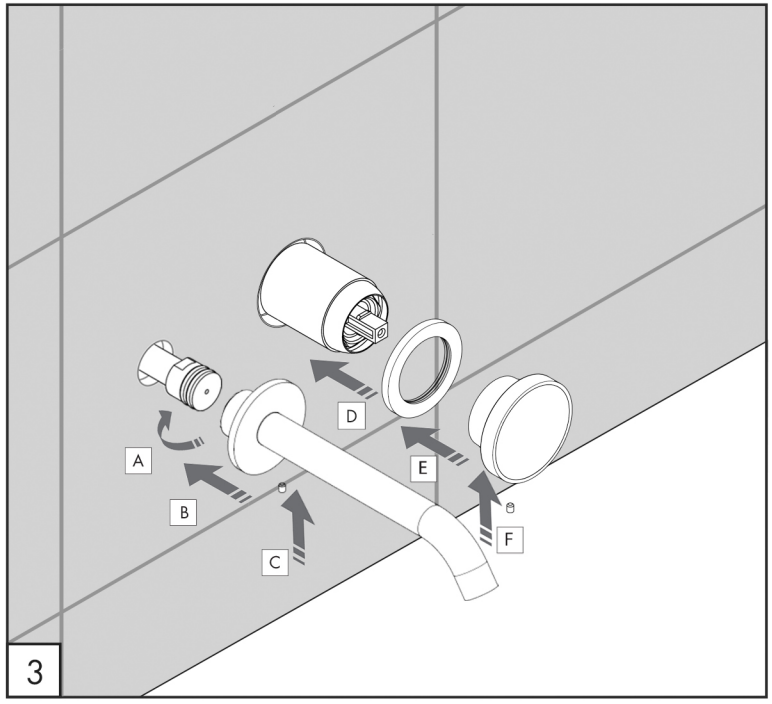

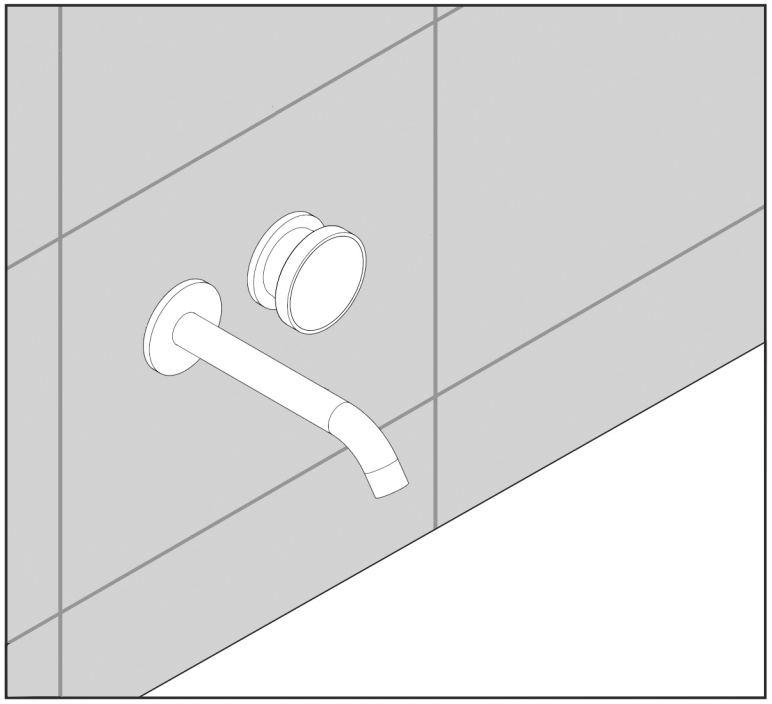

Frm 05

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid dammage of the cartridge.

WORKING TEMPERATURE

max. 70 °C
max. 158 °F