


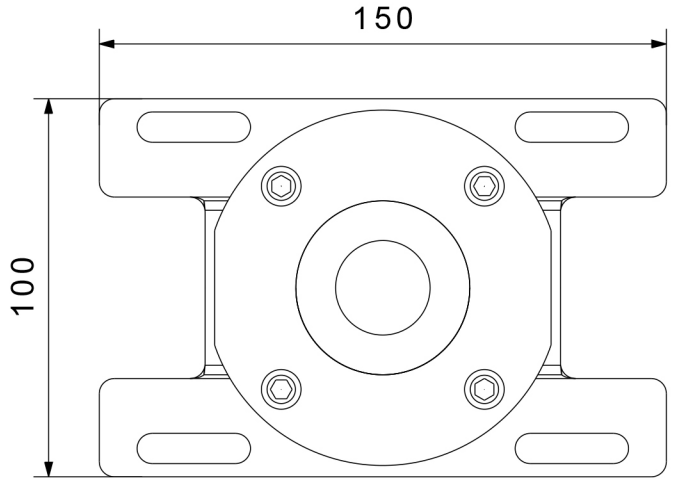


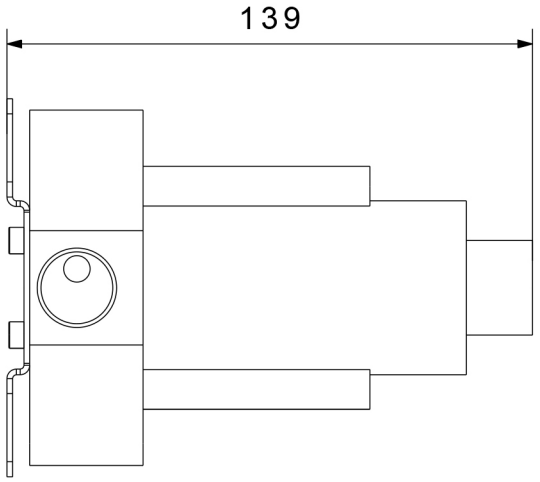

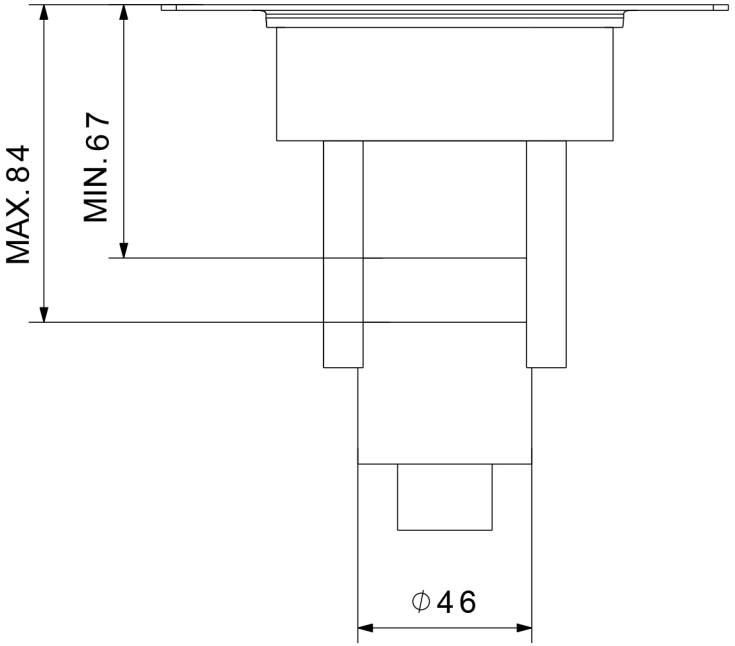

Ma 403



Ma 403


Stainless Steel 316 L


Internal part for floor mounted bath shower mixer


Flow rate aerator 5 l/min / 1.3 gpm, water saving


MAINTENCE

DO NOT USE	HCl	*cloric and muriatic acid*
	HF	*hydrofluoric acid*
	NaClO	*chlorine bleach*
TO USE	pH 7	*neutral pH detergent*

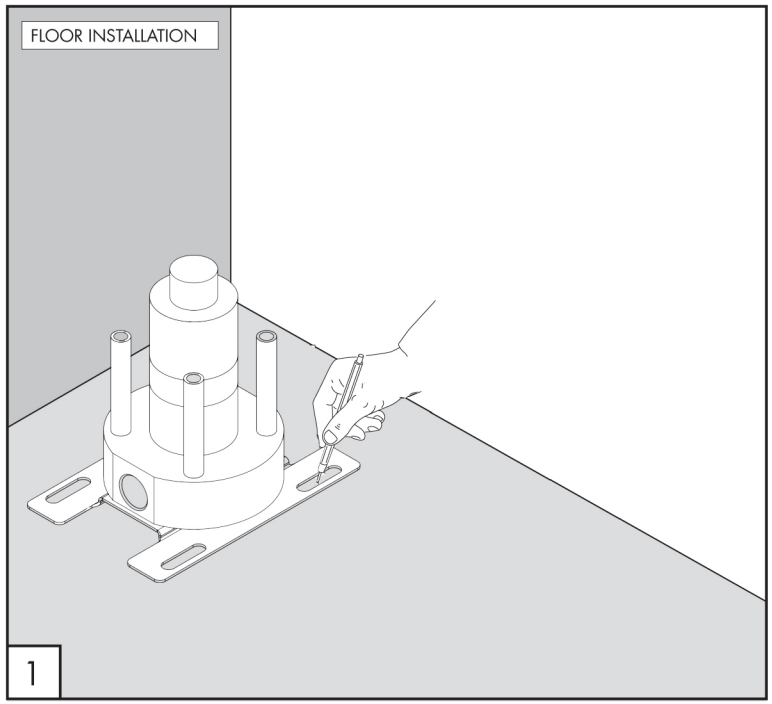

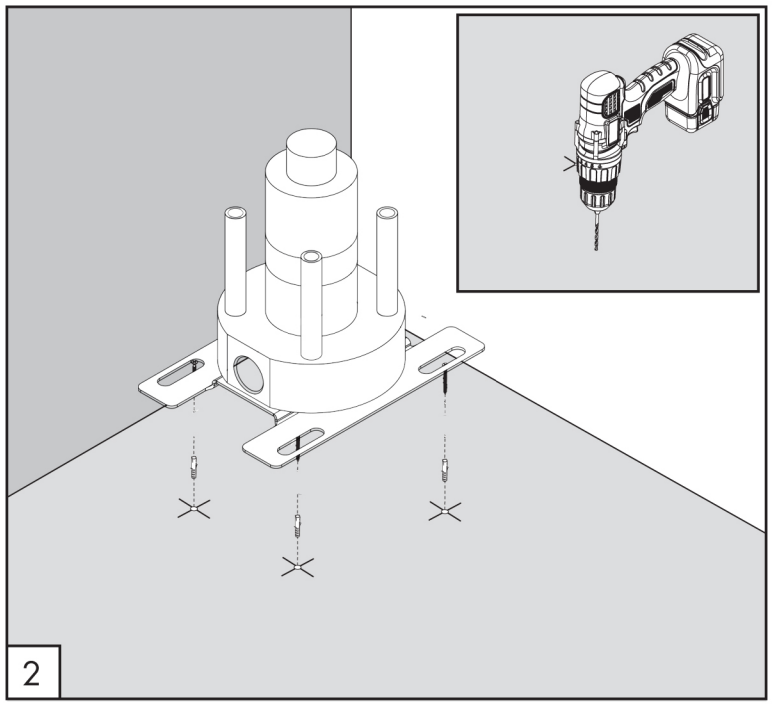

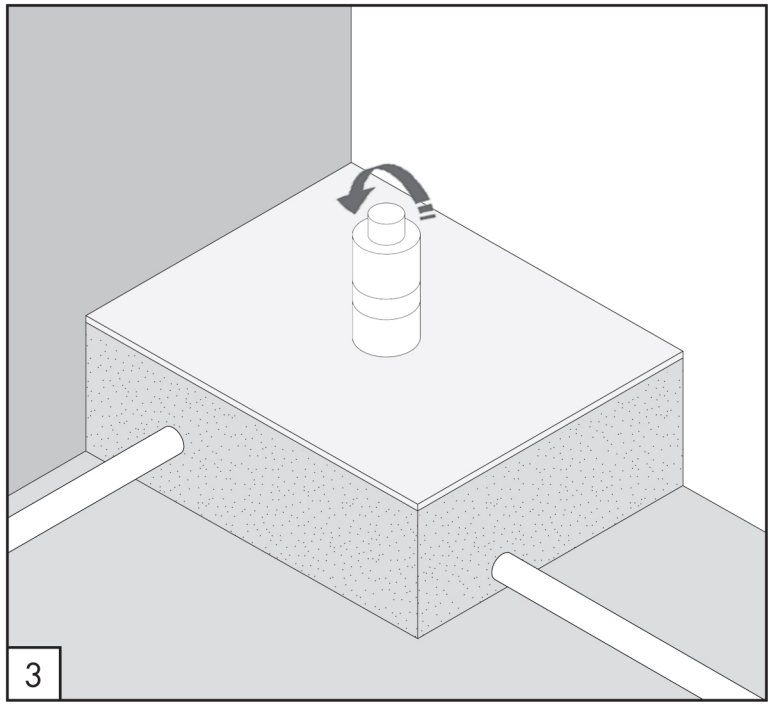

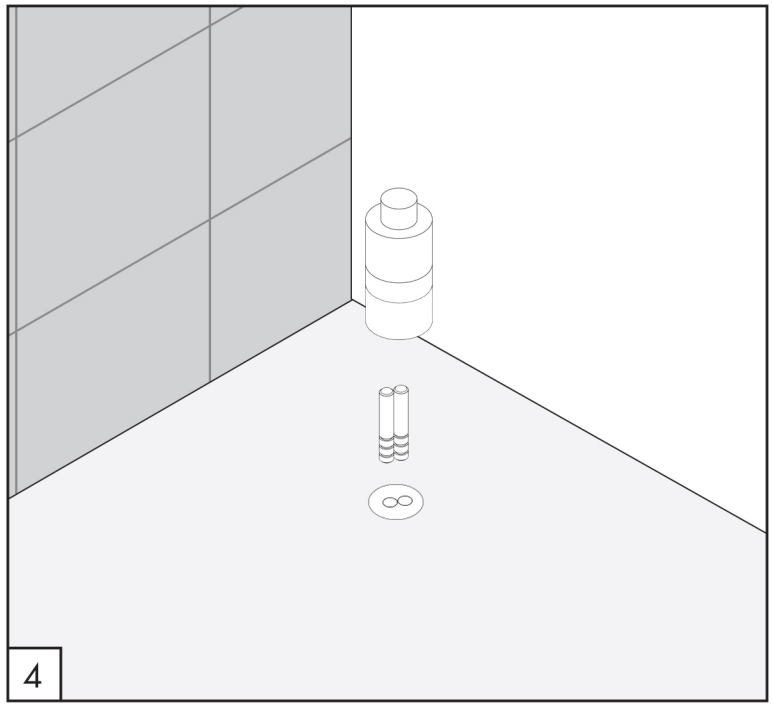


Ma 403


TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid dammage of the cartridge.

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

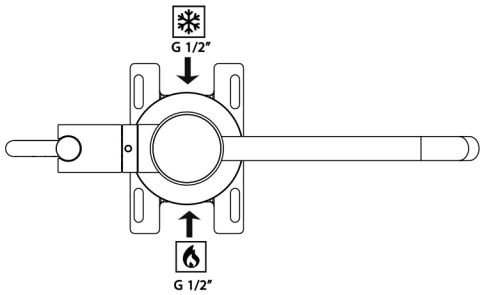

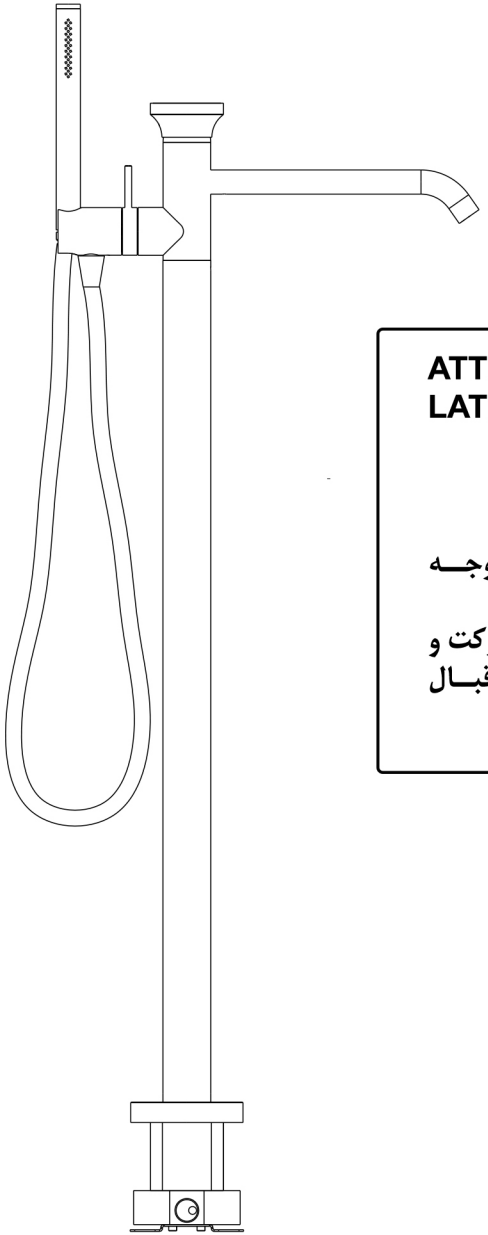

ATTENTION: DIRECTION OF INSTALLATION. FAUCET INSTALLATION DIRECTION

هشدار:
بـــه جهـــت نصـــب تجهیـــزات داخـــل کار توجـــه فرمایید.
در صـــورت نصـــب در جهـــت اشـــتباه، شـــرکت و نماینـــده فـــروش هیـــچ گونـــه مســـئولیتی در قبـــال کارکرد اشتباه شیر ندارند.

Ma 403

Ma 403
Stainless Steel 316 L

Internal part for floor mounted bath shower mixer

Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENCE

DO NOT USE	HCl	*cloric and muriatic acid*
	HF	*hydrofluoric acid*
	NaClO	*chlorine bleach*
TO USE	pH 7	*neutral pH detergent*