
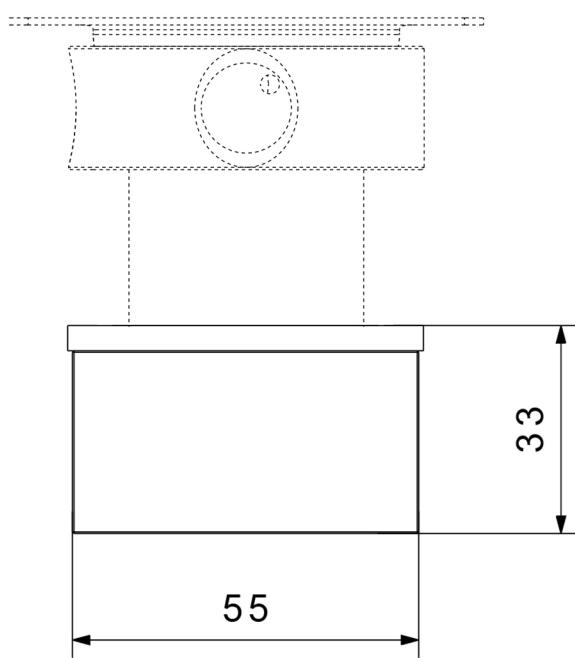
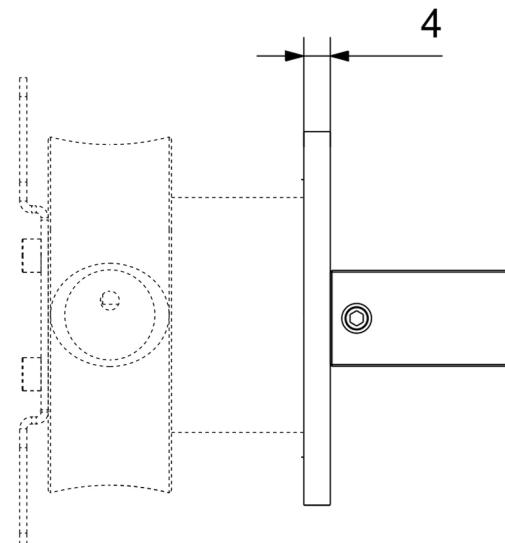


Frz 07

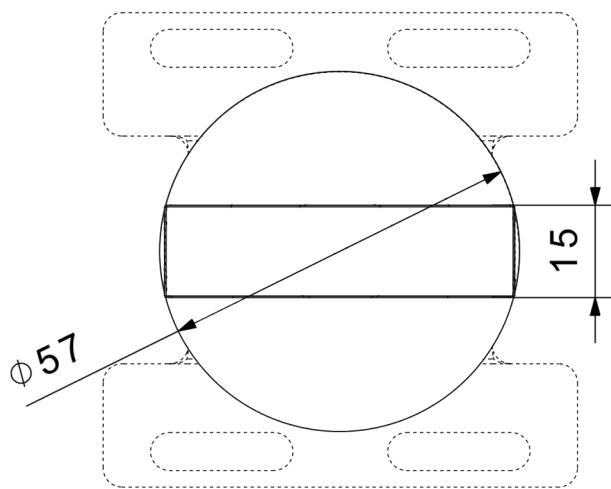

Frz 07

Single lever toilet mixer
QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving




Product that needs built-in part

MAINTENANCE

DO NOT USE		chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

Frz 07

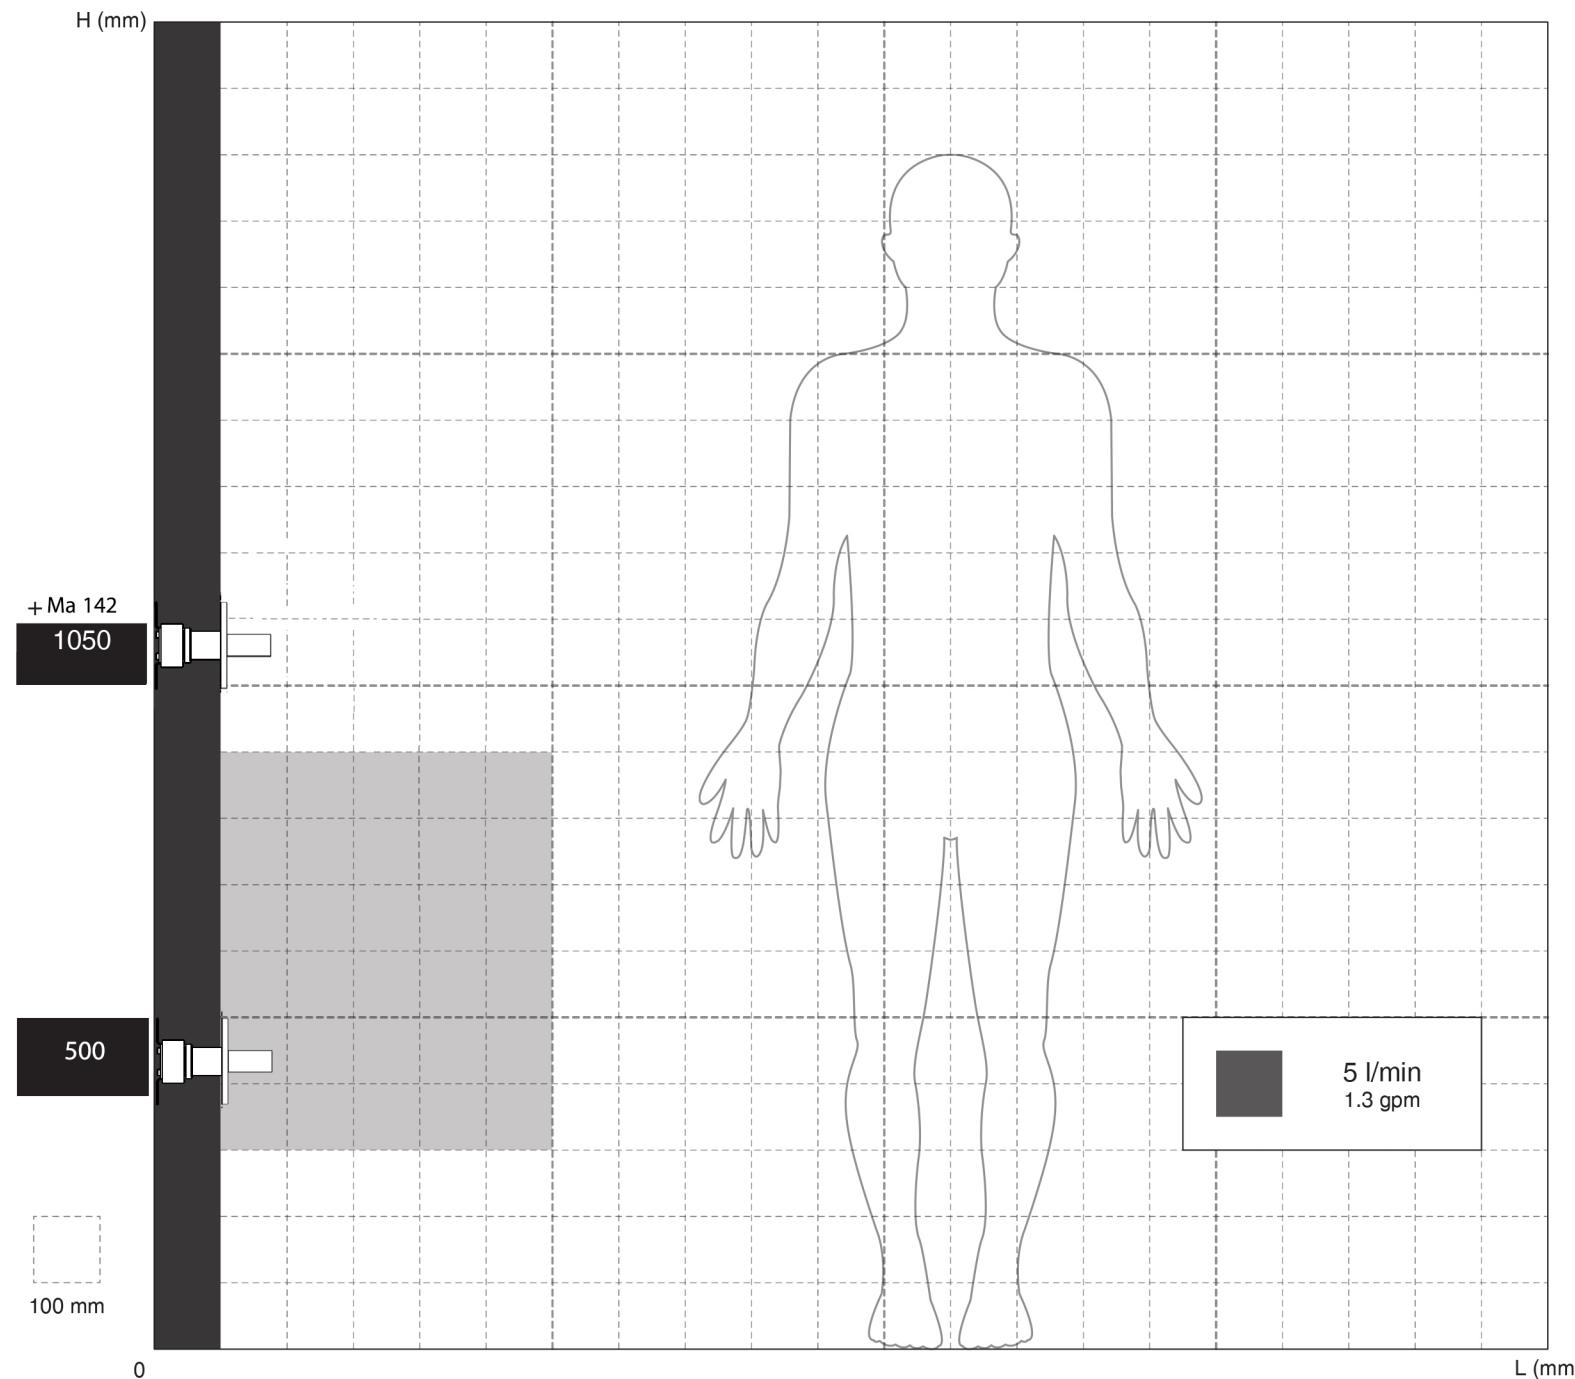

INSTALLATION WARNINGS

Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.

AERATOR INCLUDED







oopoop

Arn 07

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

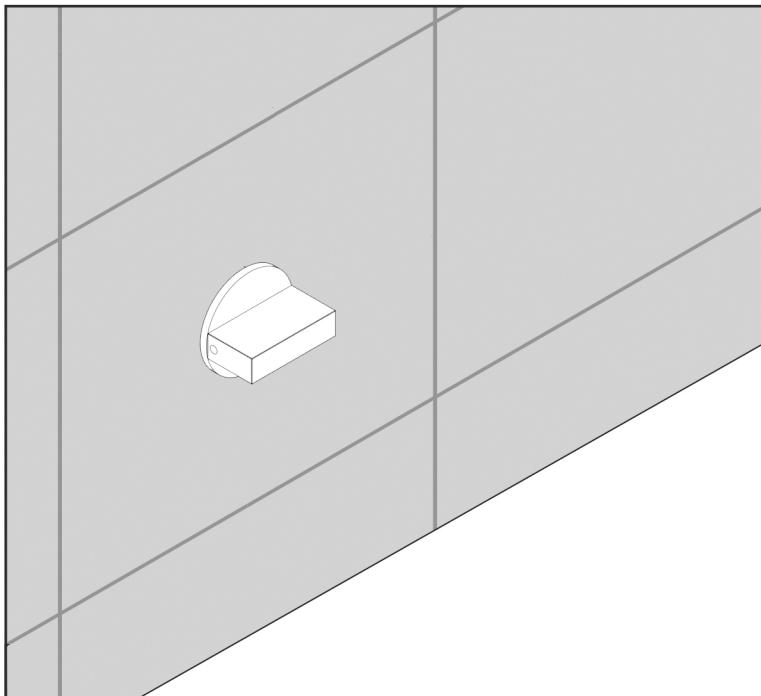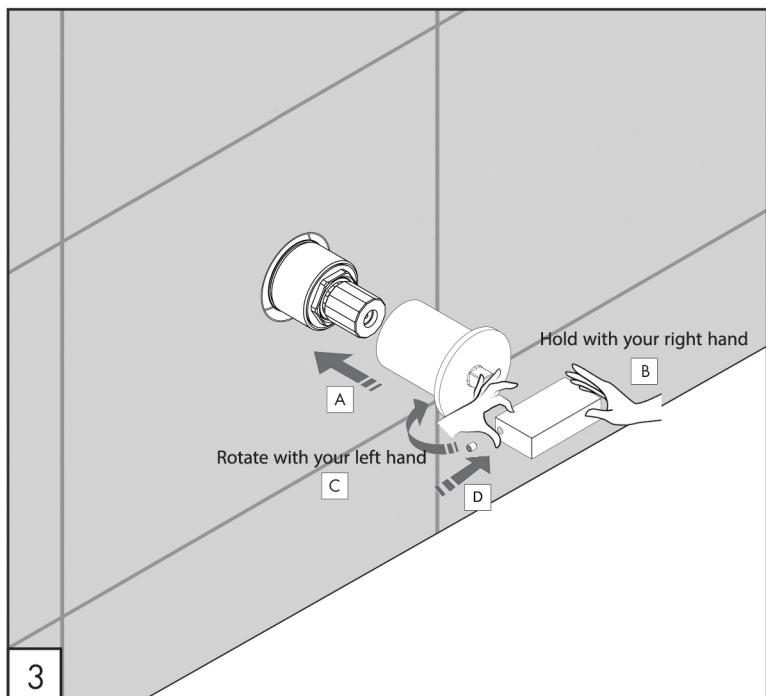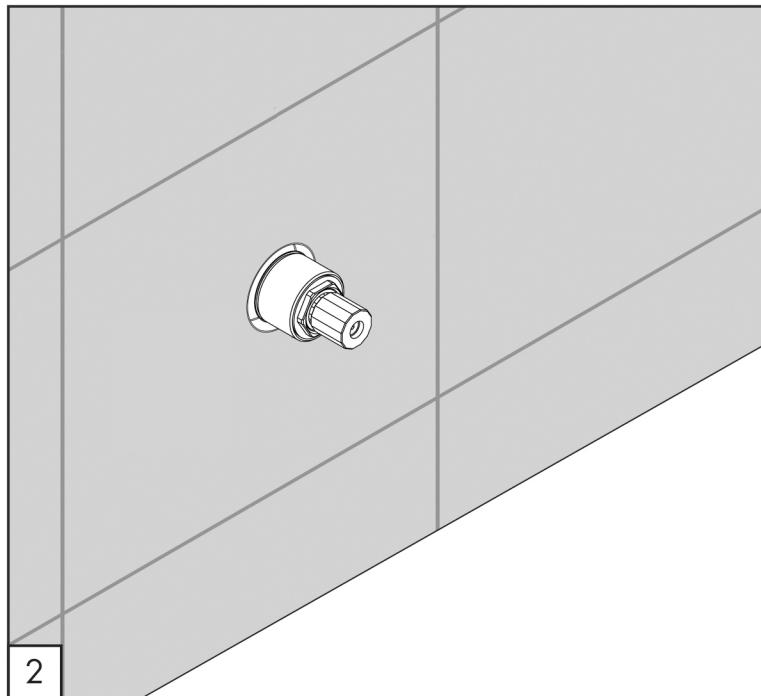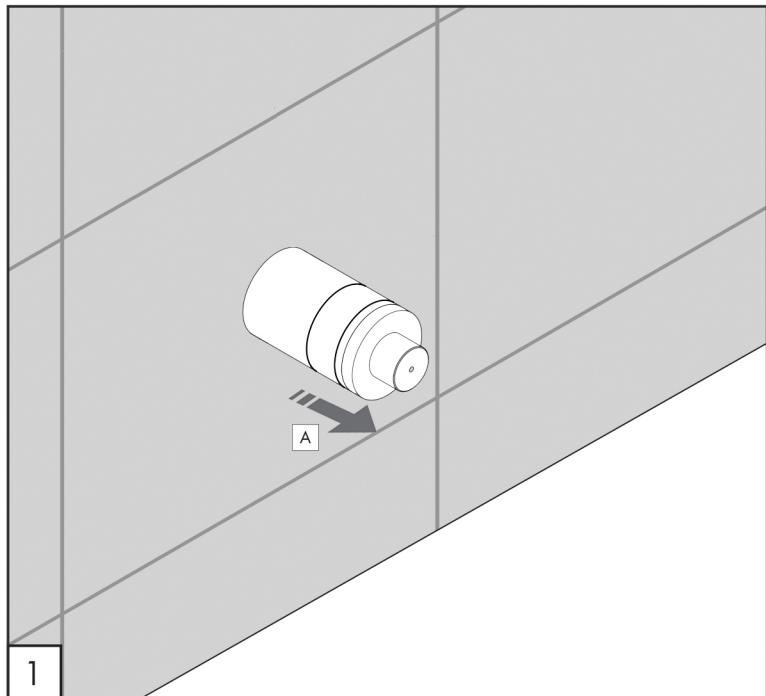

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

opop