

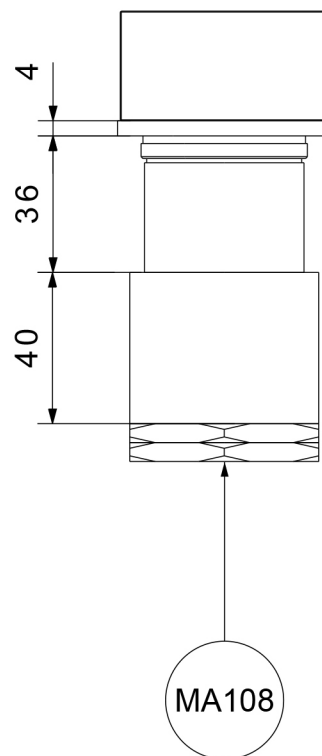


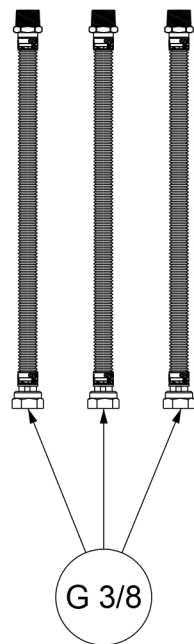

MA108

Frz 08

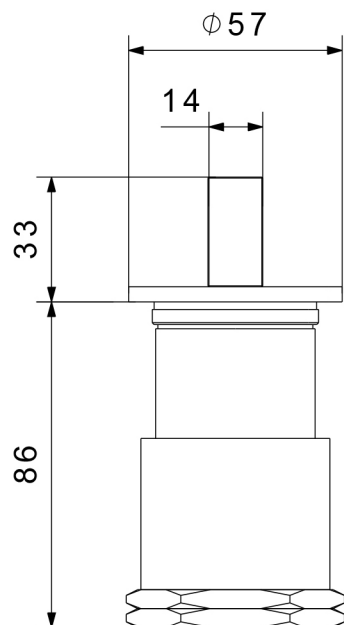

Frz 08
Deck mounted control
QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving






Product that needs built-in part

MAINTENANCE

DO NOT USE		cloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent



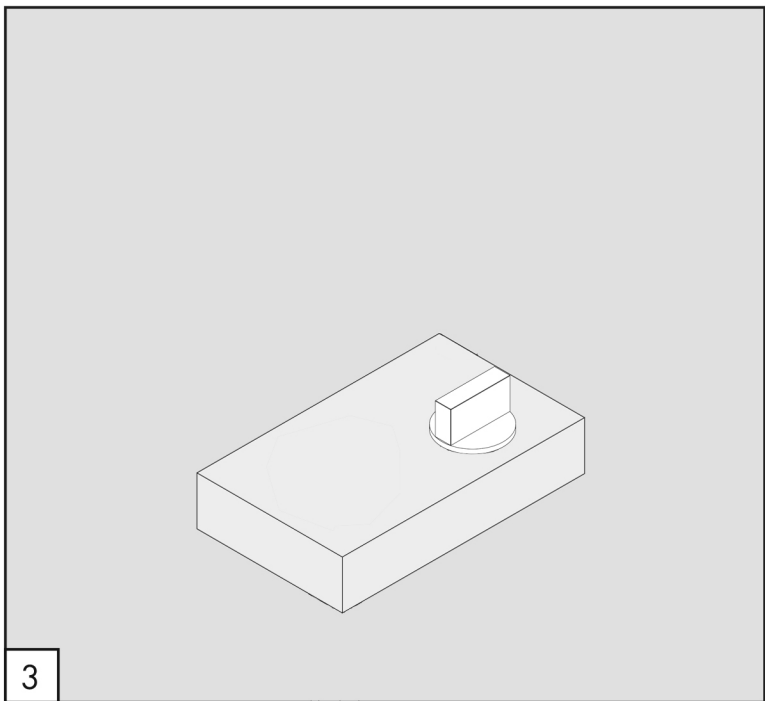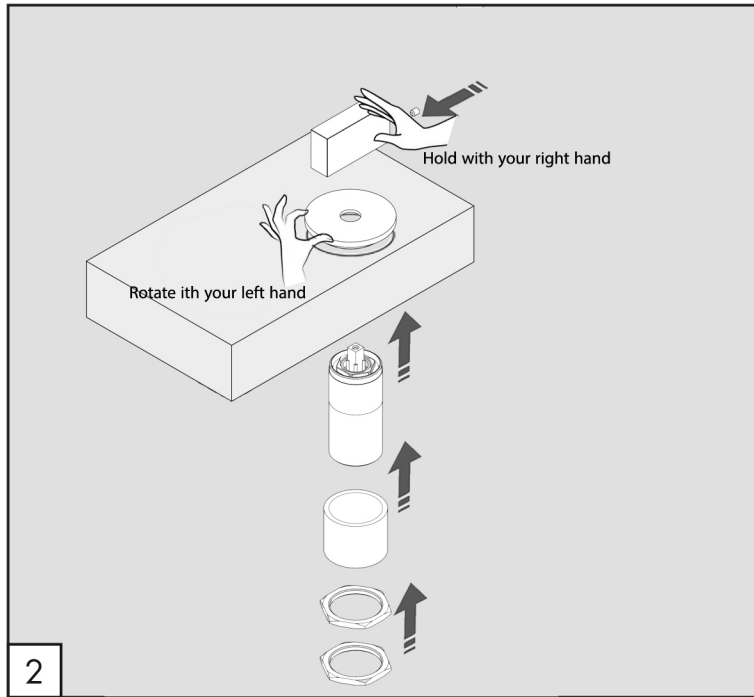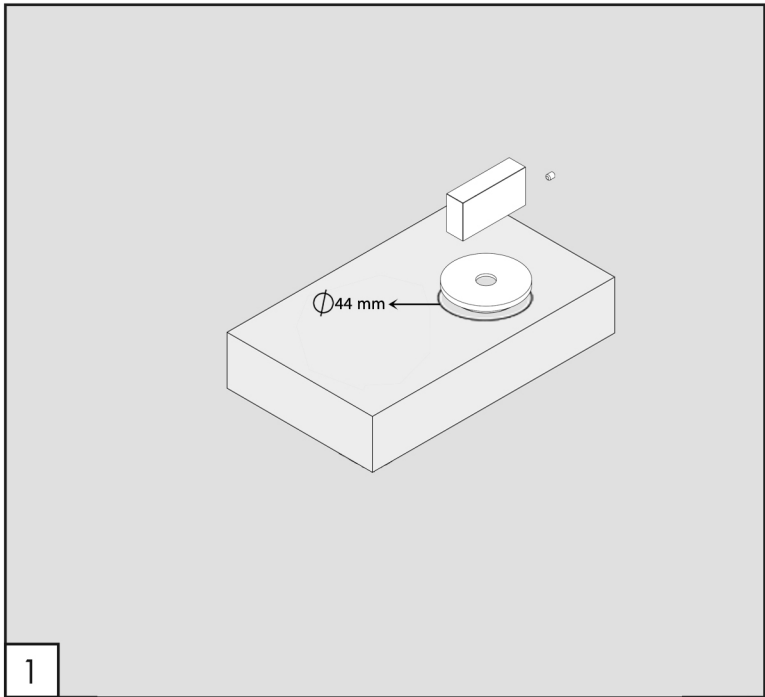

Frz 08

WORKING TEMPERATURE

 max. 70 °C
max. 158 °F

