
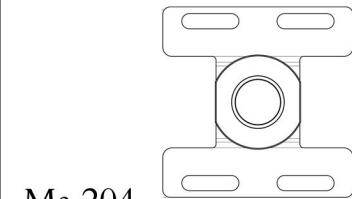
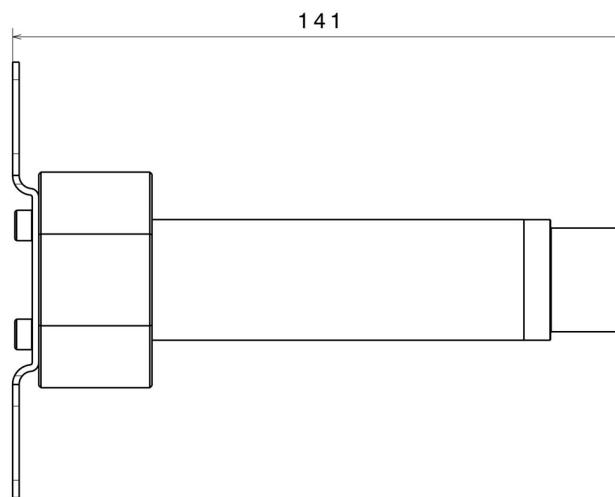


Ma 204

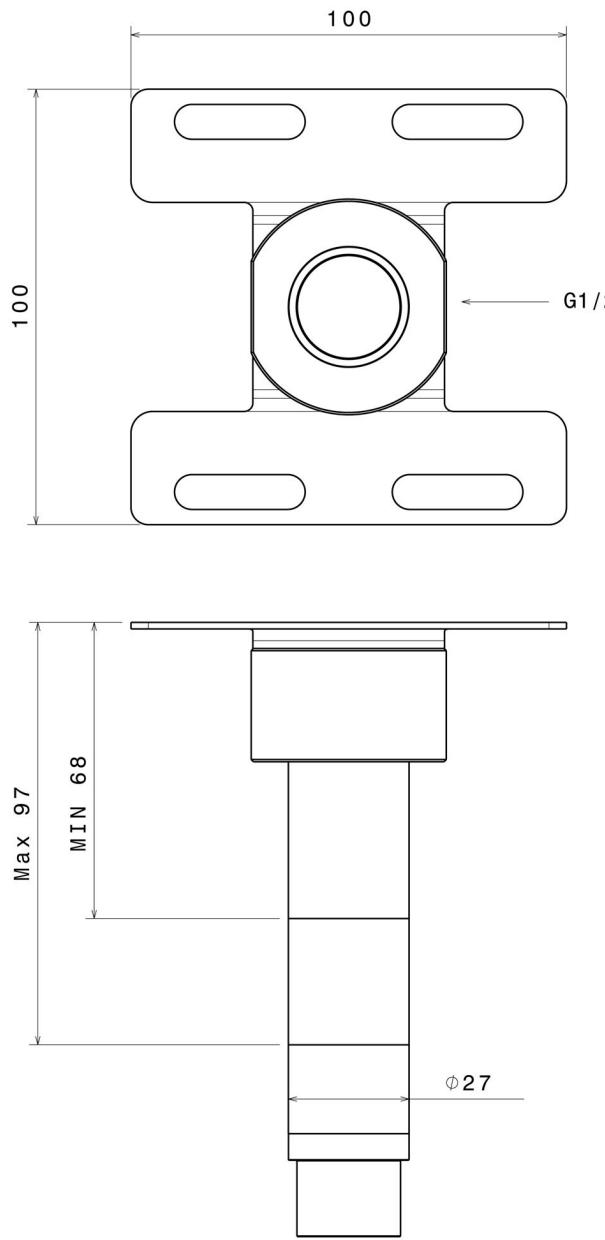

Ma 204

Stainless Steel 304 L

Internal part for floor mounted basin mixer







Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENANCE

DO NOT USE	<chem>HCl</chem> cloric and muriatic acid
	<chem>HF</chem> hydrofluoric acid
	<chem>NaOCl</chem> chlorine bleach
TO USE	<chem>pH 7</chem> neutral pH detergent

*All DIMS TO BE IN MM

oopo

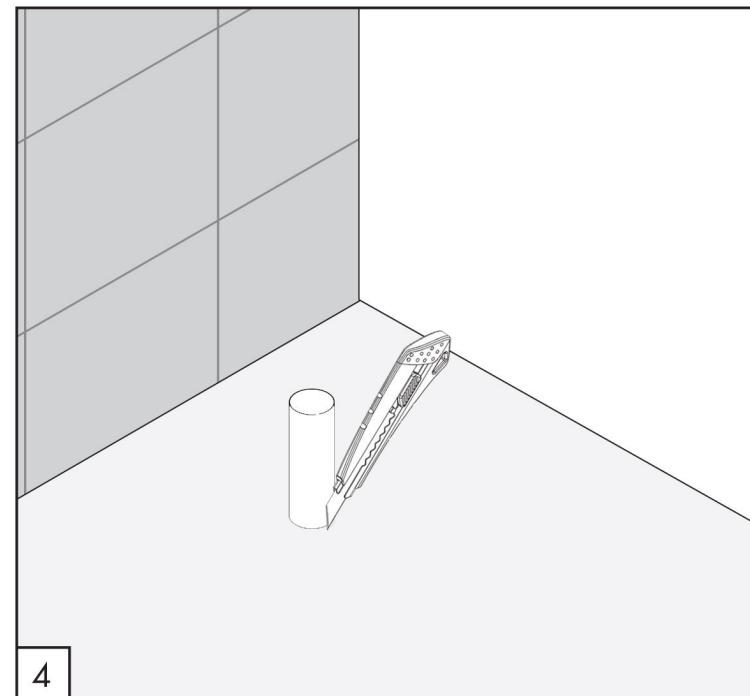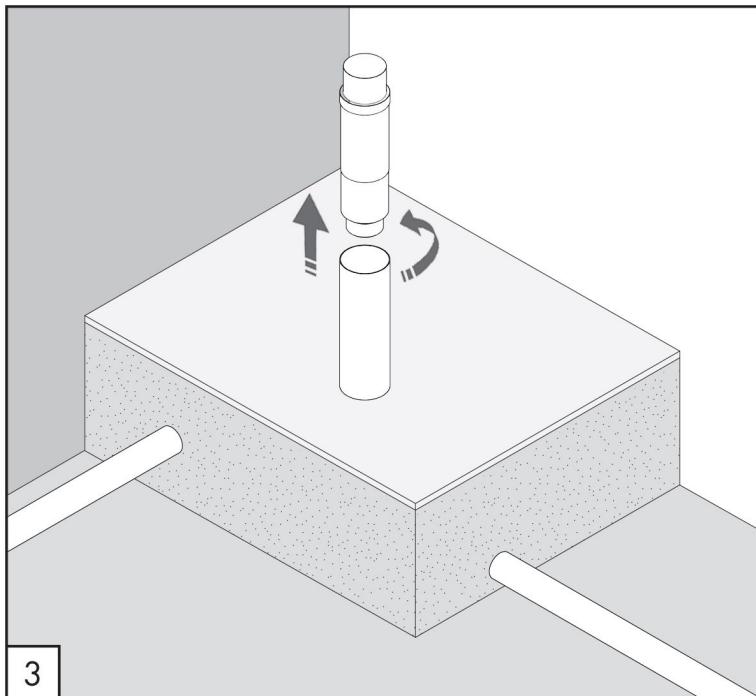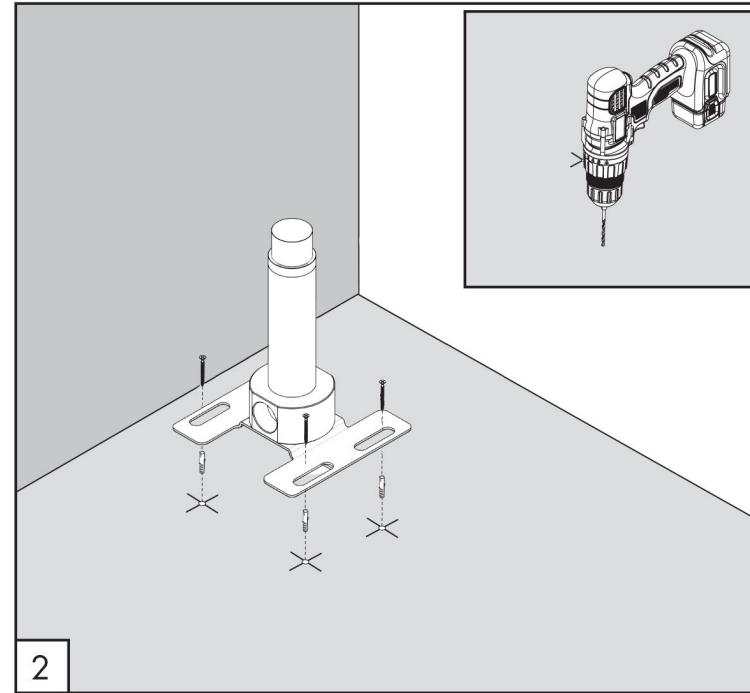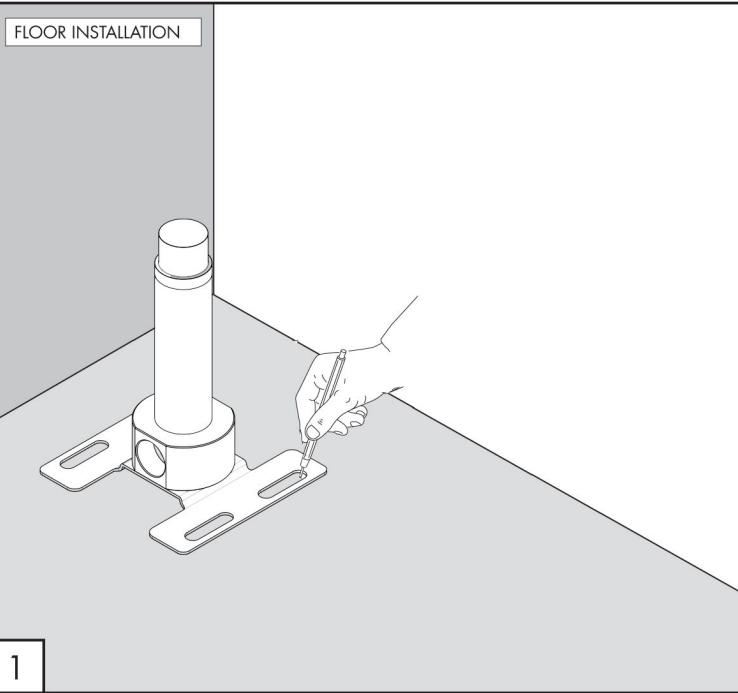

Ma 204

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

oopp