




## Sbl 01



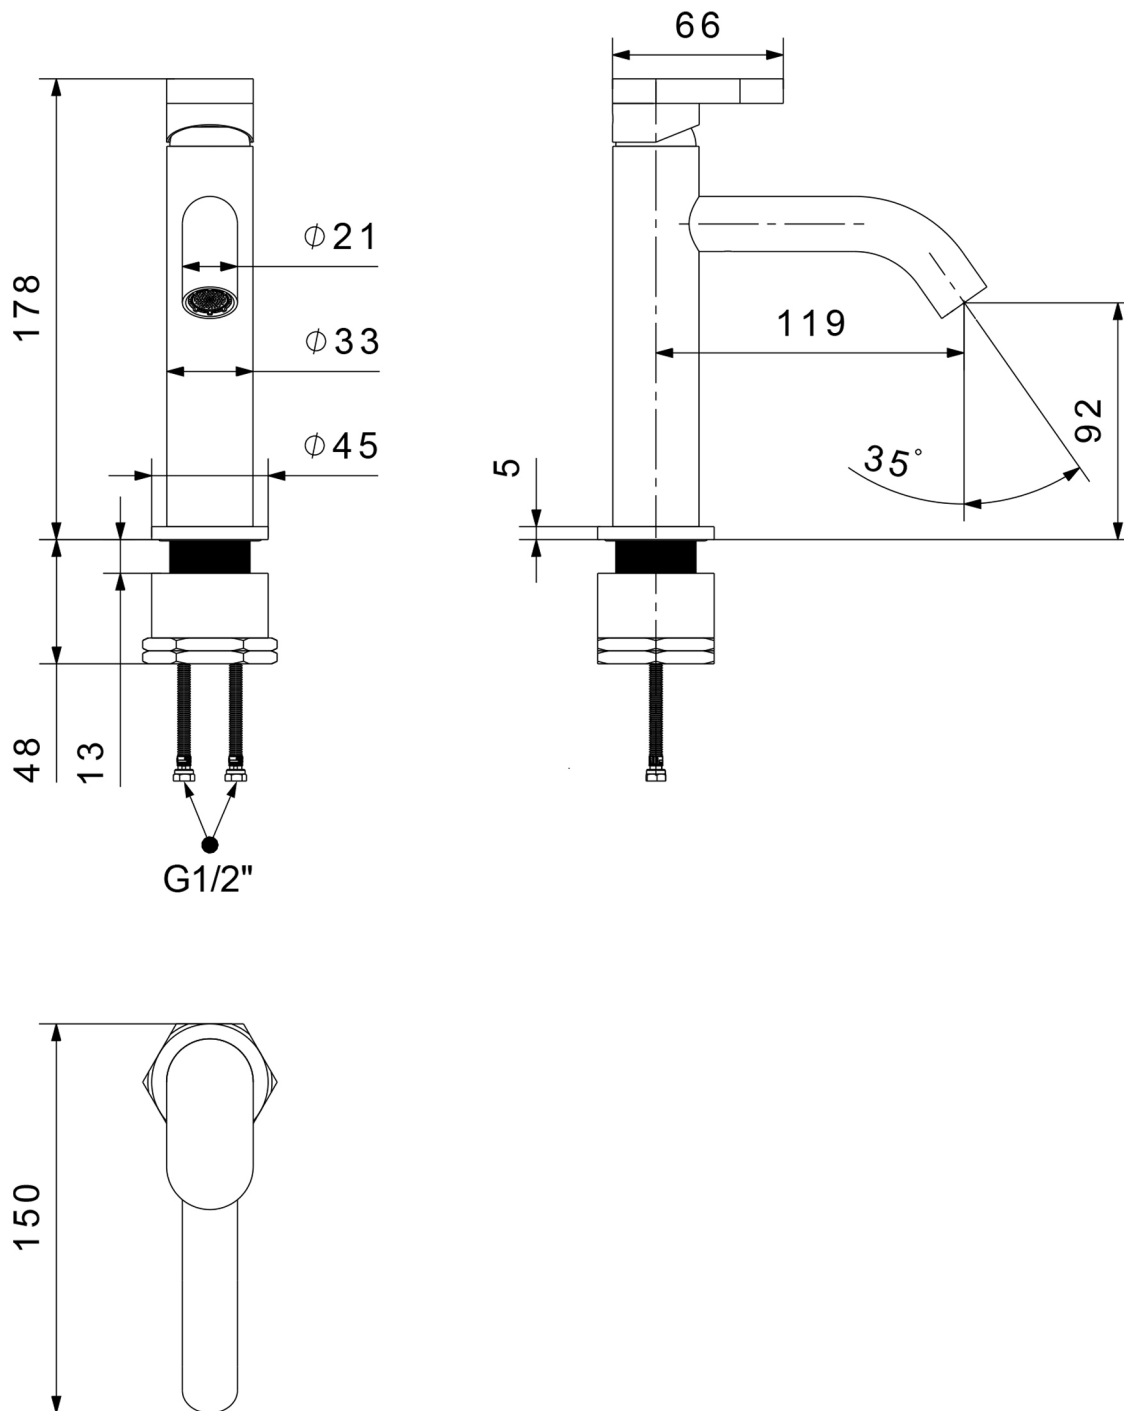


Flow rate aerator 5 l/min / 1.3 gpm, water saving

### MAINTENANCE

|            |  |                           |
|------------|--|---------------------------|
| DO NOT USE |  | chloric and muriatic acid |
|            |  | hydrofluoric acid         |
|            |  | chlorine bleach           |
| TO USE     |  | neutral pH detergent      |



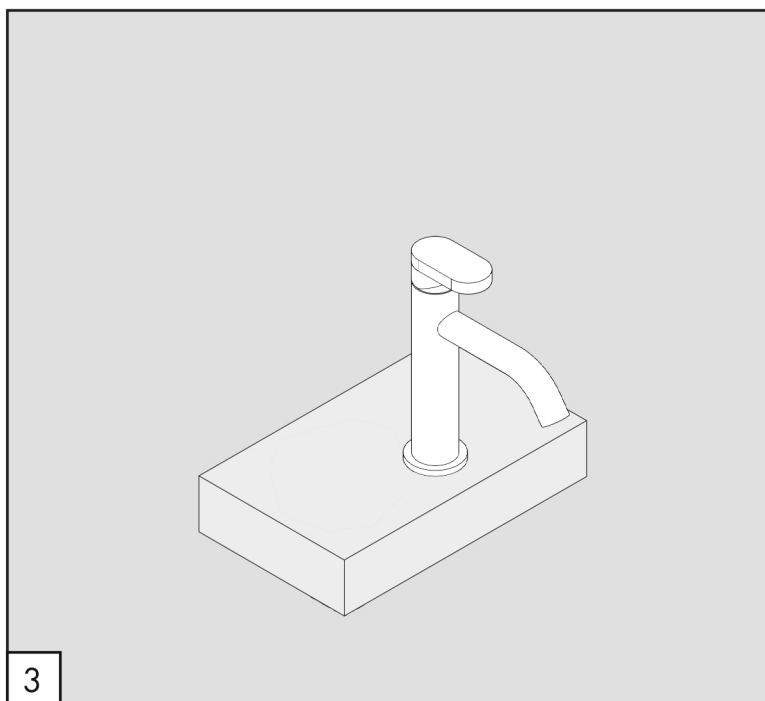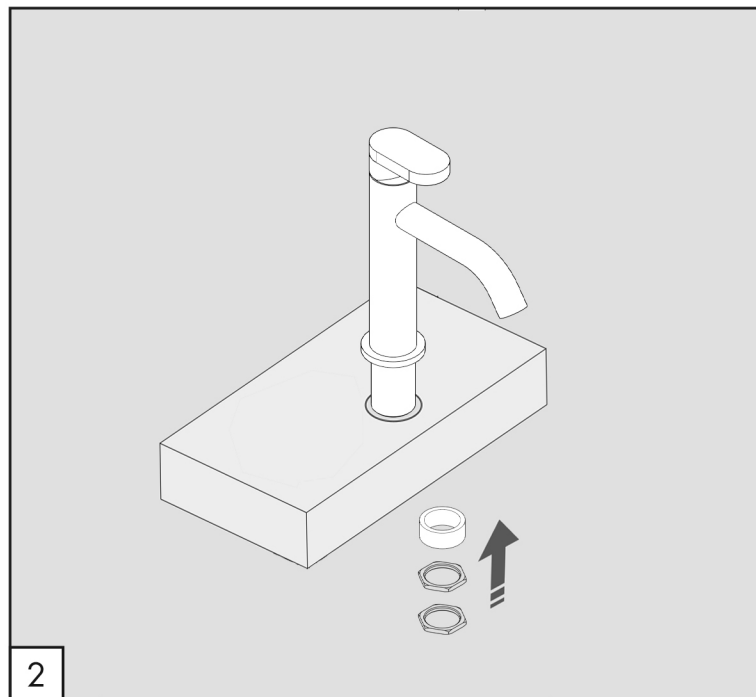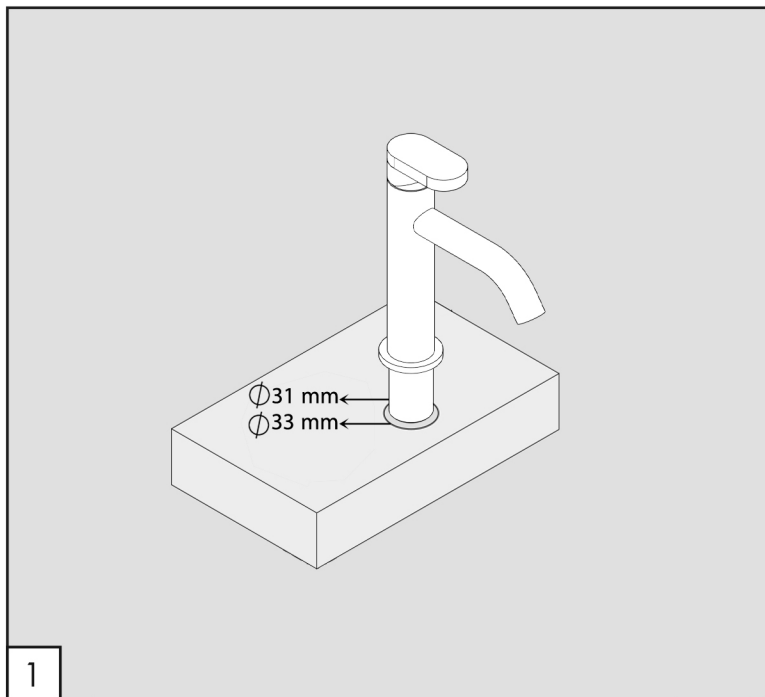

Sbl 01

WORKING TEMPERATURE

 max. 70 °C  
max. 158 °F

