


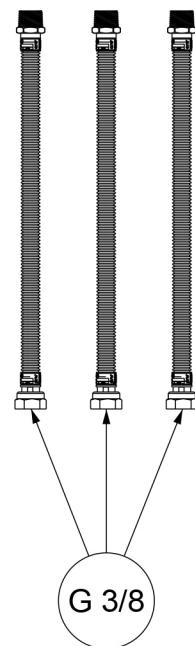


# Sbl 08

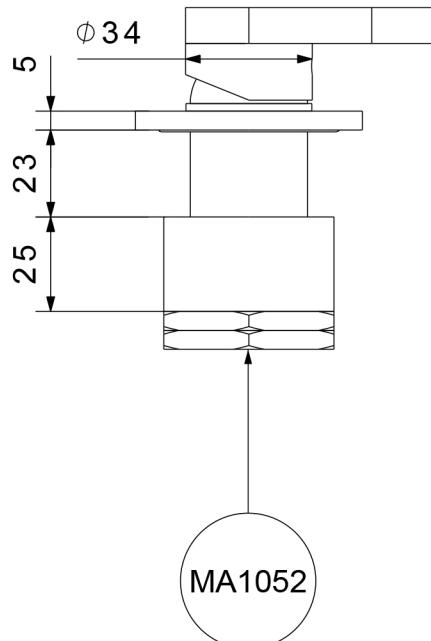

**Sbl 08**  
Deck mounted control  
QOOP

Stainless steel 316L

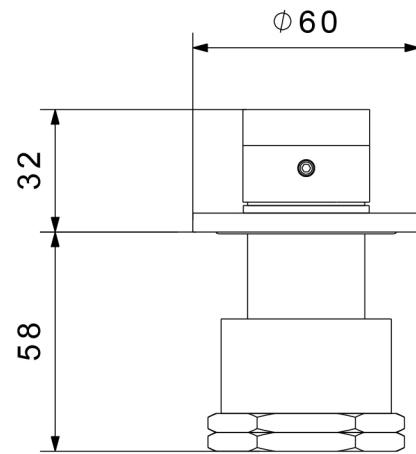

Flow rate aerator 5 l/min / 1.3 gpm, water saving






Product that needs built-in part

## MAINTENANCE

DO NOT USE		chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

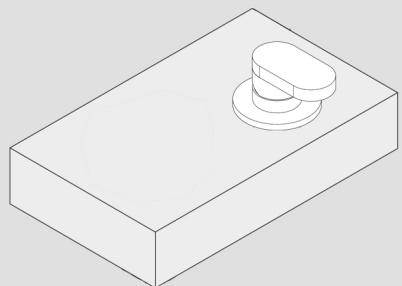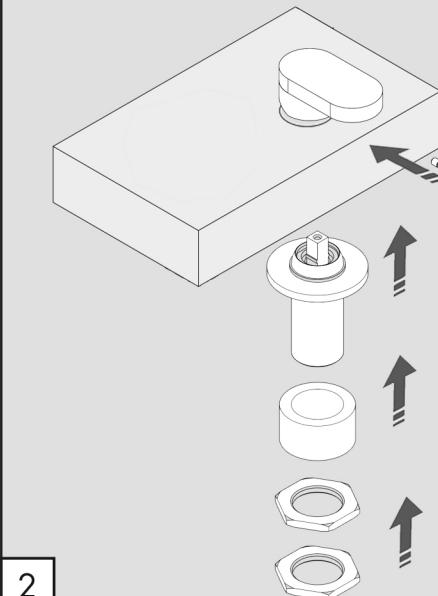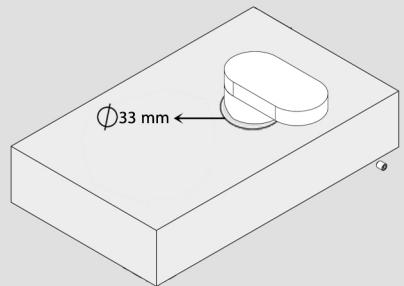

---

WORKING TEMPERATURE

max. 70 °C  
max. 158 °F

---