


Acc 158



Acc 158
roll holder

QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving




Product that needs built-in part


MAINTENANCE

DO NOT USE		chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

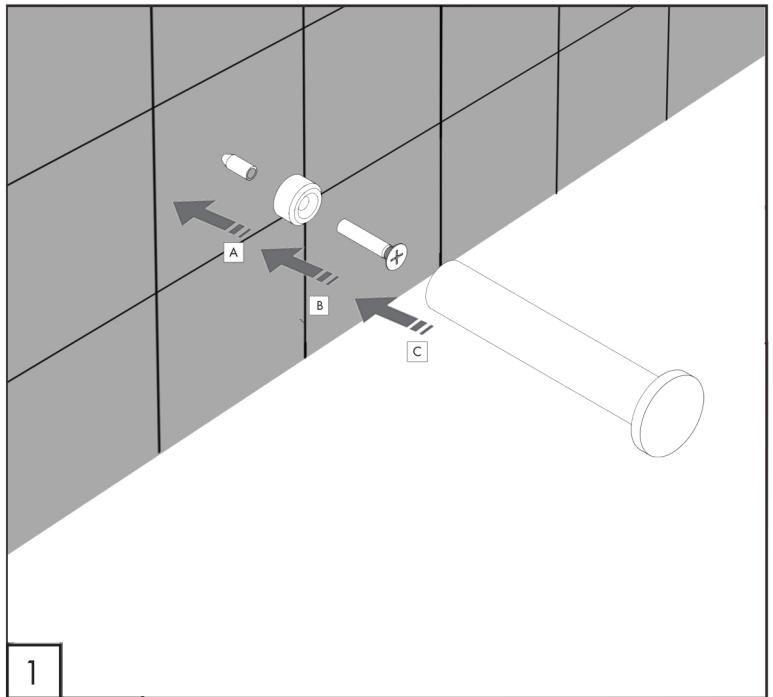

1

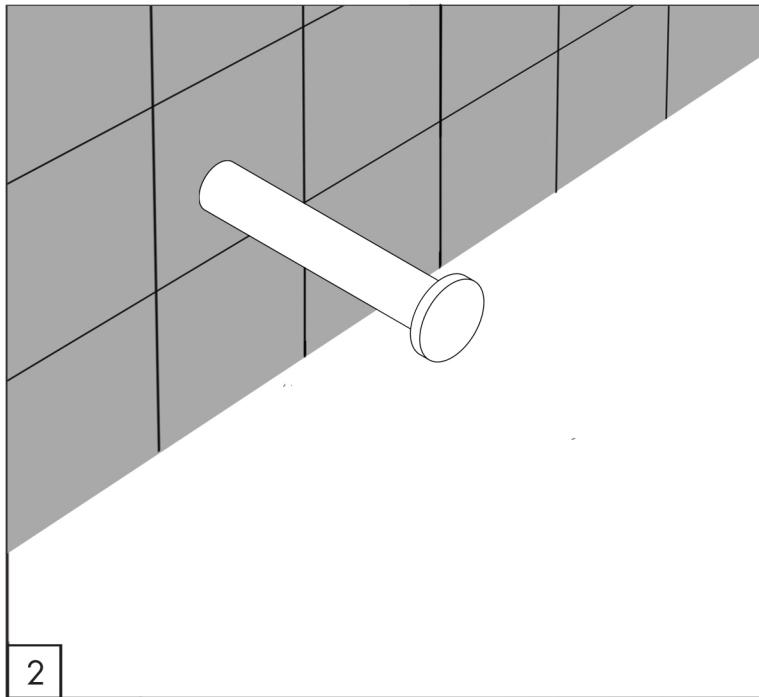

2

Acc 158

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

qooop