


Ma 403




Ma 403

Stainless Steel 316 L

Internal part for floor mounted bath shower mixer







Flow rate aerator 5 l/min / 1.3 gpm, water saving

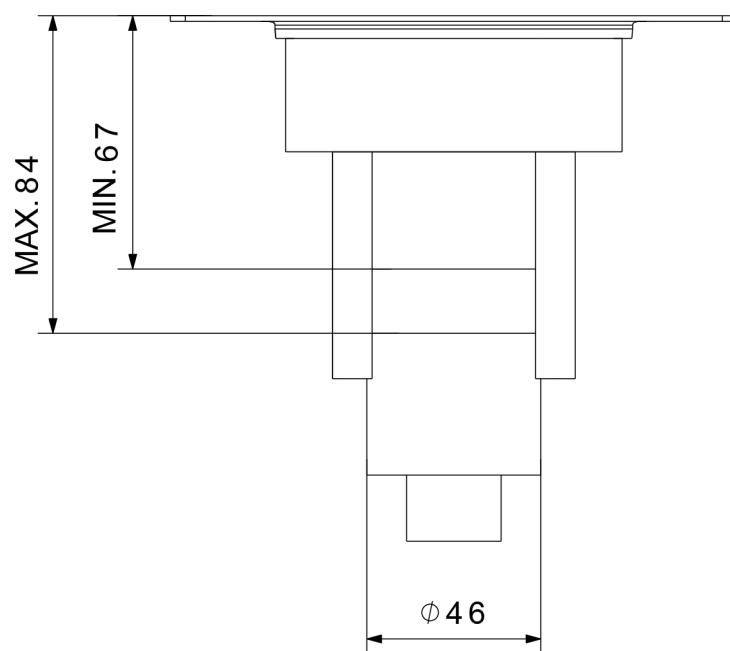

MAINTENANCE

DO NOT USE		chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

oopop

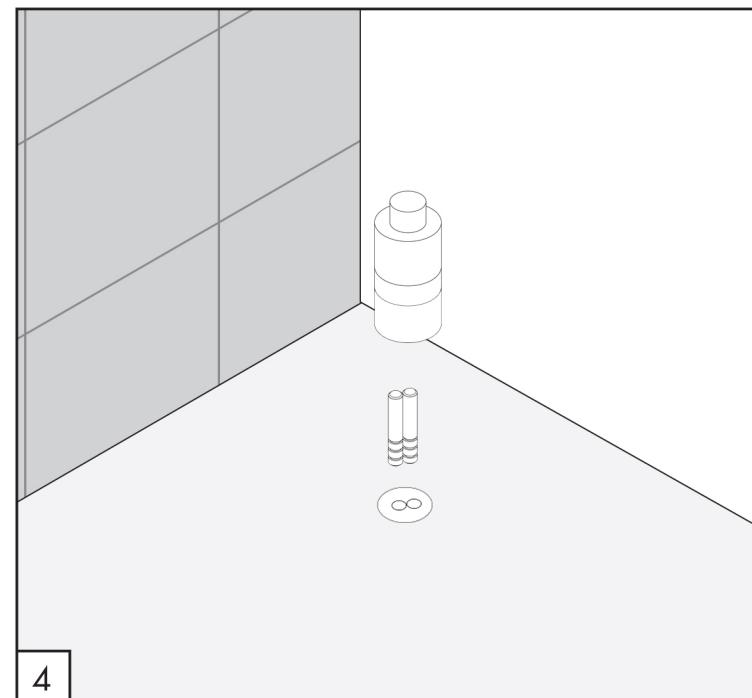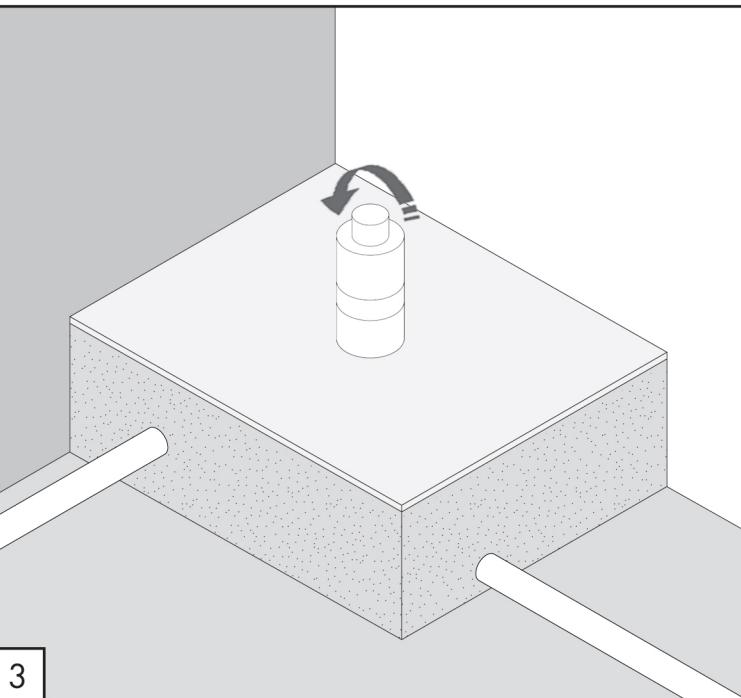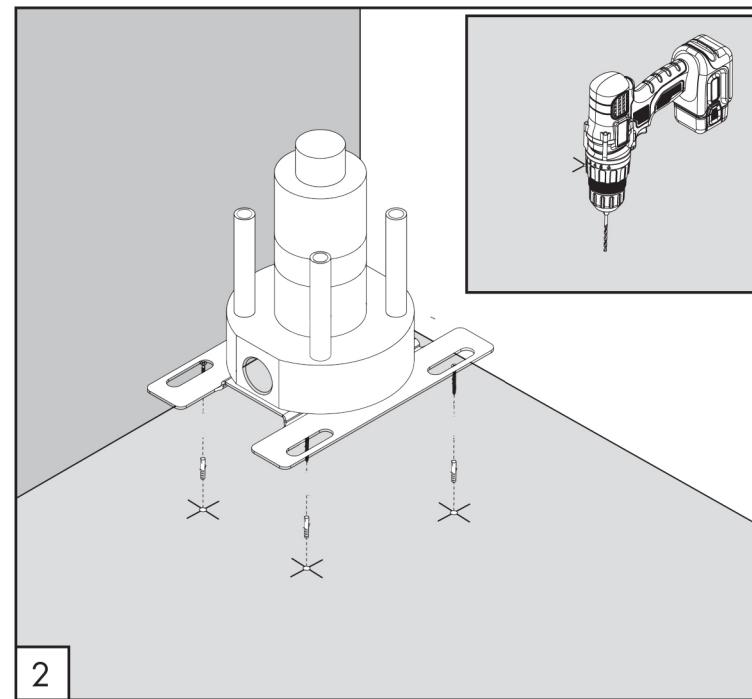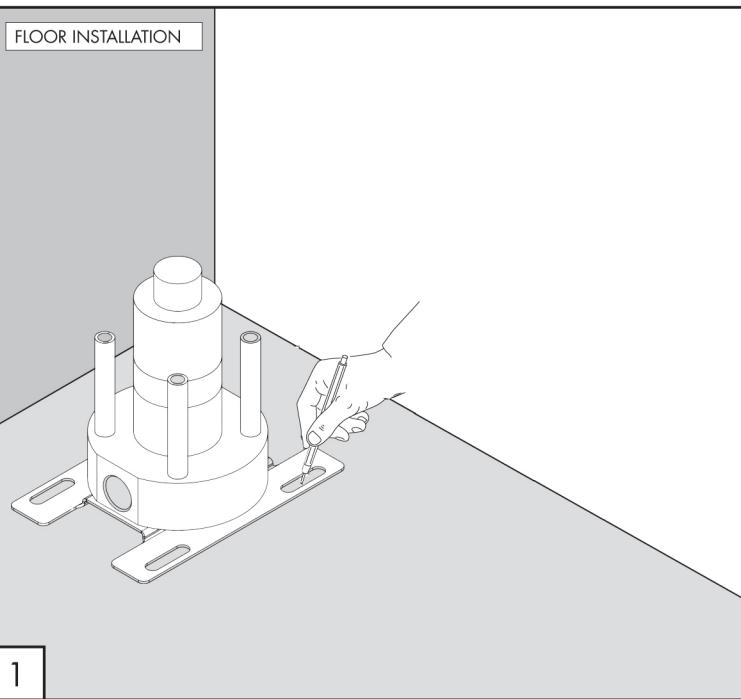

Ma 403


TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

oopp

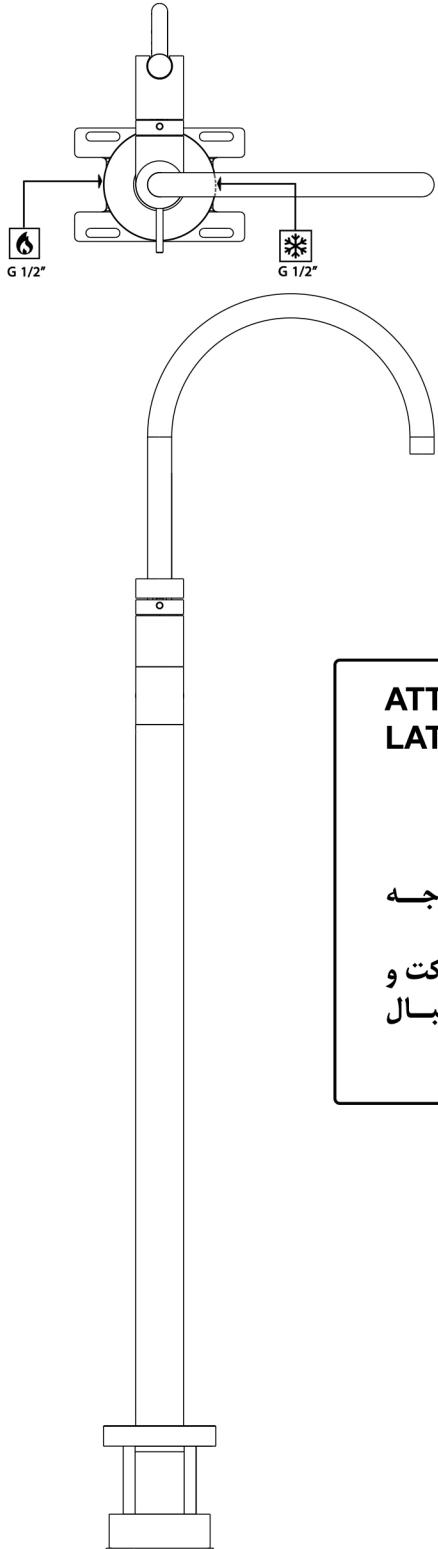

Ma 403

Ma 403
Stainless Steel 316 L

Internal part for floor mounted bath shower mixer

ATTENTION: DIRECTION OF INSTALLATION. FAUCET INSTALLATION DIRECTION

هشدار:
به جهت نصب تجهیزات داخل کار توجه
فرمایید.
در صورت نصب در جهت اشتباه، شرکت و
نماینده فروش هیچ گونه مسئولیتی در قبال
کارکرد اشتباه شیر ندارند.



Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENANCE

DO NOT USE		chloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent

oopop