


Alm 02



Alm 02
Stainless Steel 316 L

Rain shower head ,with ball joint

*Requires Built in part
*Included Built in part




Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENANCE

DO NOT USE		chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

oopop

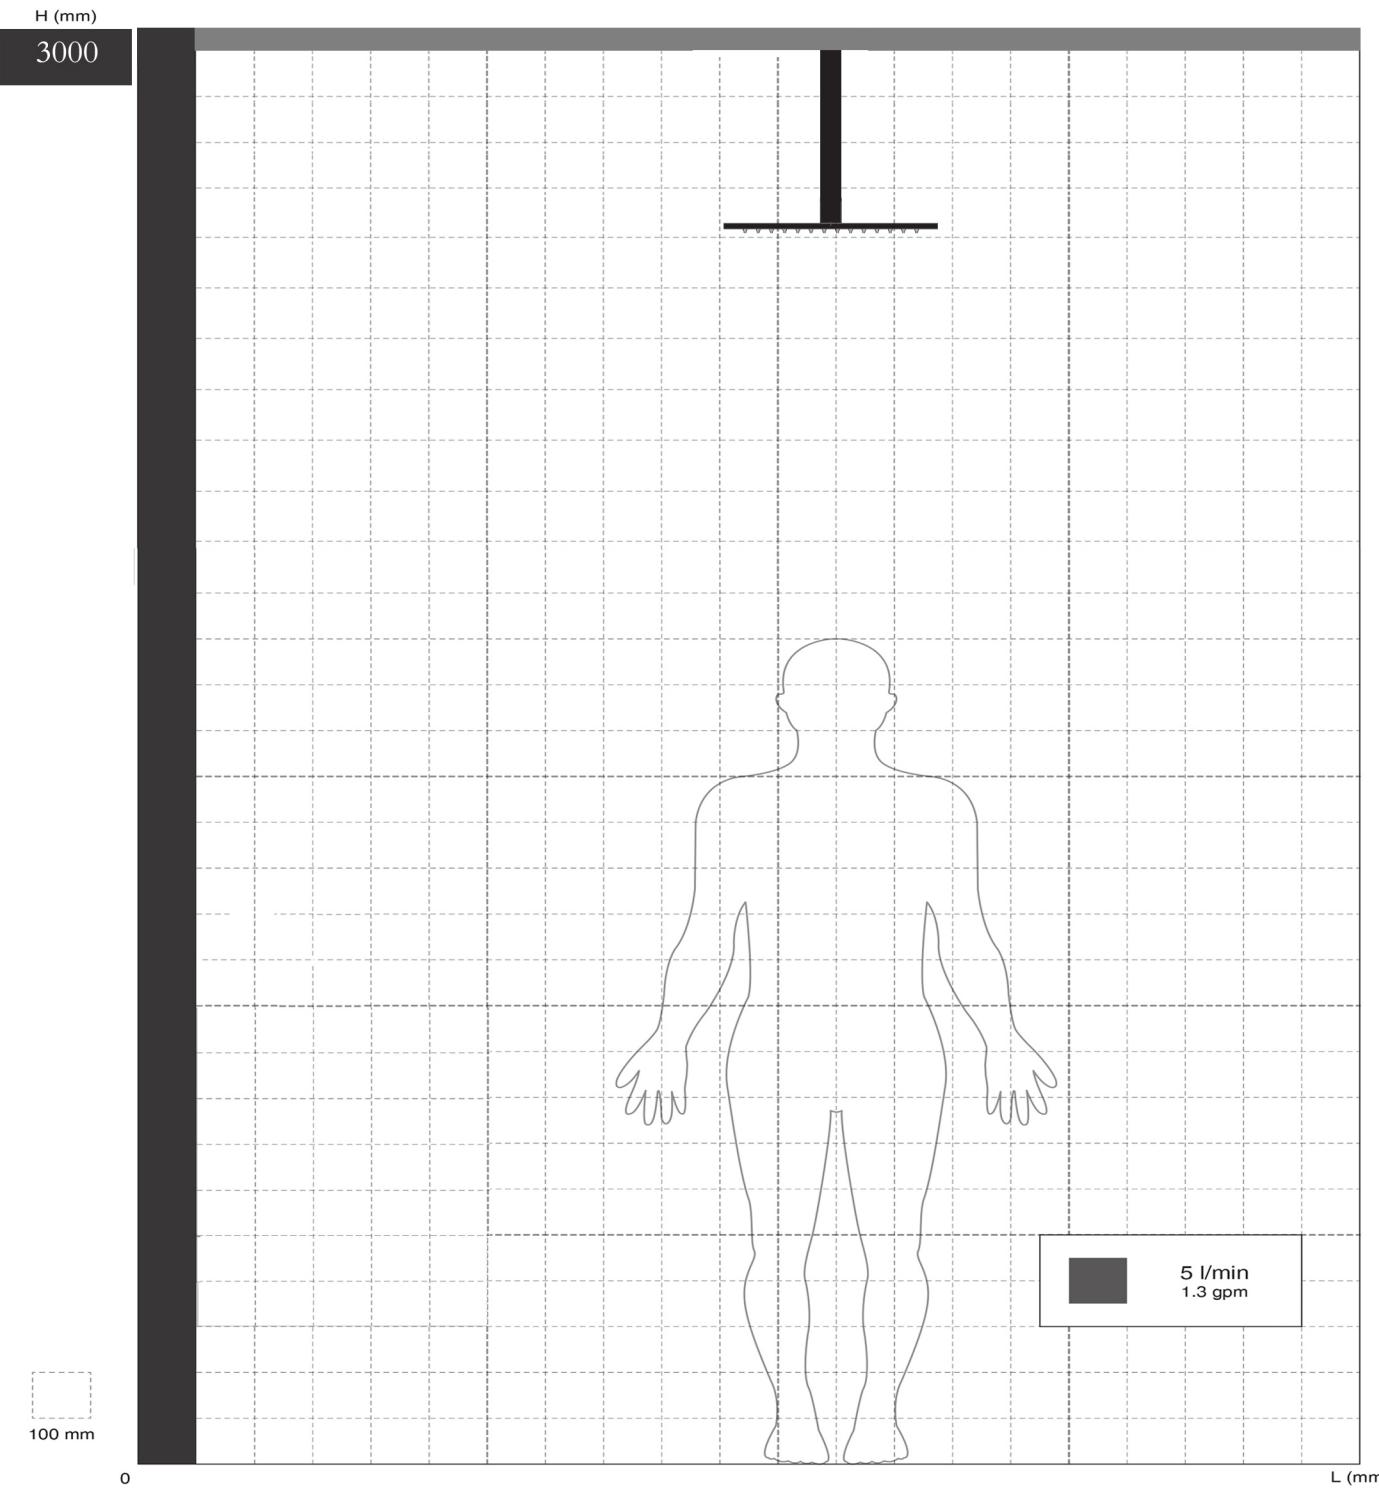

Alm02

INSTALLATION WARNINGS

Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.



AERATOR INCLUDED



AERATORS ON DEMAND

- Icon of a water droplet inside a square frame, followed by the text 'Compliant with LEED standards 1,9 l/min / 0.5 gpm'.
- Icon of a water droplet inside a square frame, followed by the text 'Compliant with LEED standards 3,8 l/min / 1 gpm'.

qoop

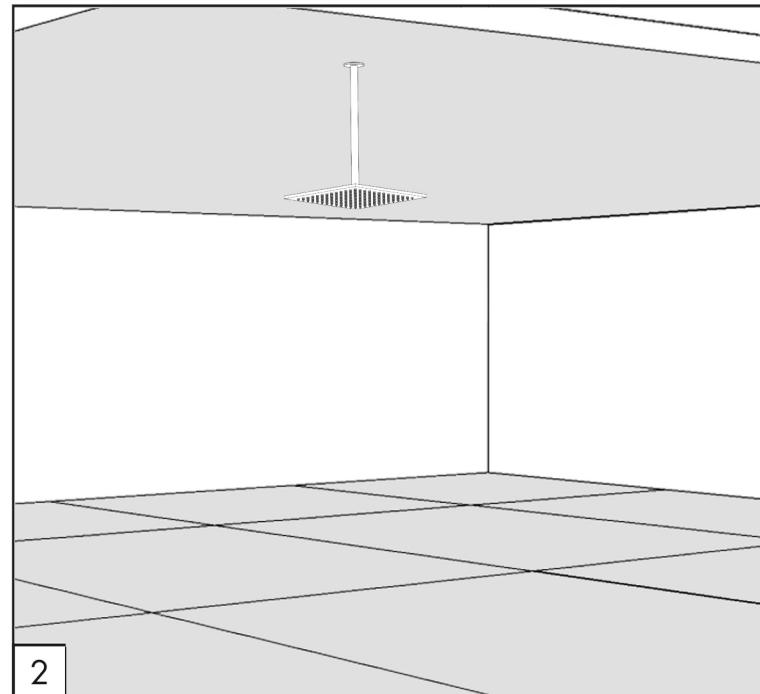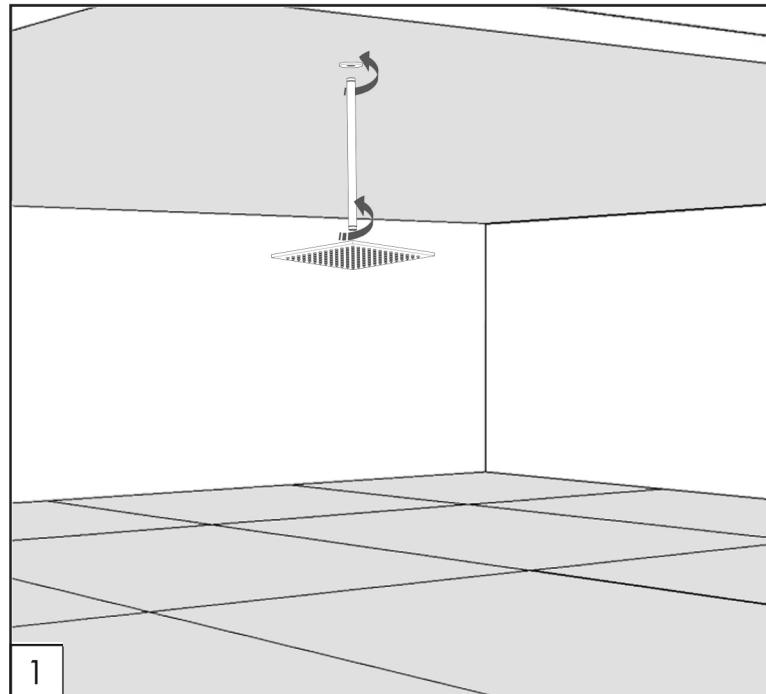

WORKING TEMPERATURE

thermometer icon: max. 70 °C
thermometer icon: max. 158 °F
