



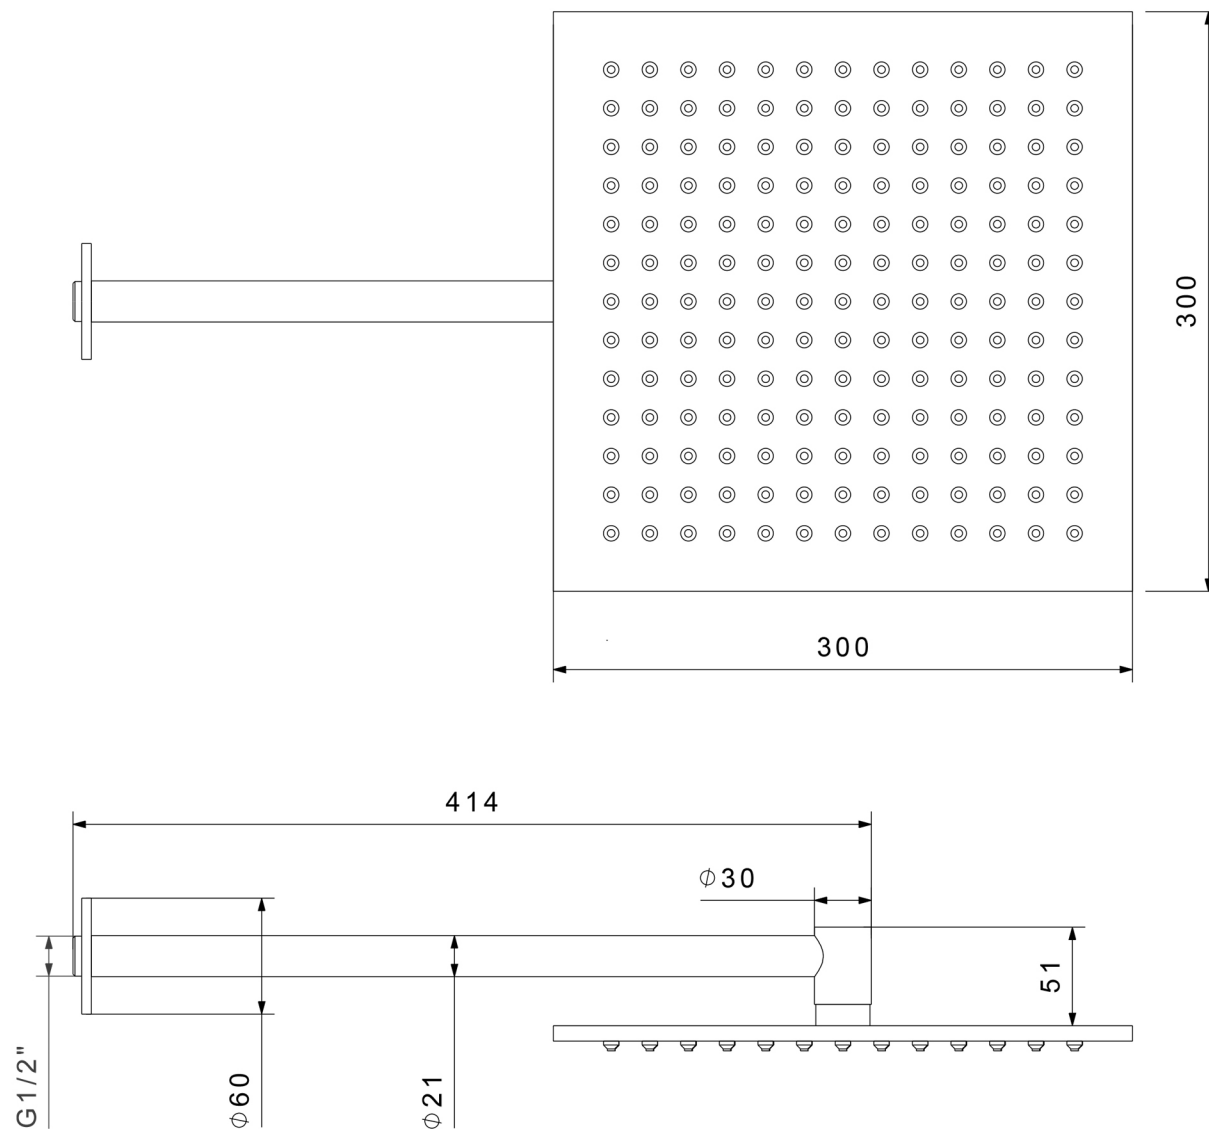

Alm 02



Alm 02

Stainless Steel 316 L

Rain shower head ,with ball joint

- Requires Built in part
- Included Built in part



Flow rate aerator 5 l/min / 1.3 gpm, water saving

MAINTENANCE

DO NOT USE	HCl	cloric and muriatic acid
	HF	hydrofluoric acid
	NaClO	chlorine bleach
TO USE	pH 7	neutral pH detergent



Alm02

INSTALLATION WARNINGS

Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.


AERATOR INCLUDED

 **Mounted aerator**
5 l/min / 1.3 gpm

AERATORS ON DEMAND

 **Compliant with LEED standards**
1.9 l/min / 0.5 gpm



 **Compliant with LEED standards**
3.8 l/min / 1 gpm

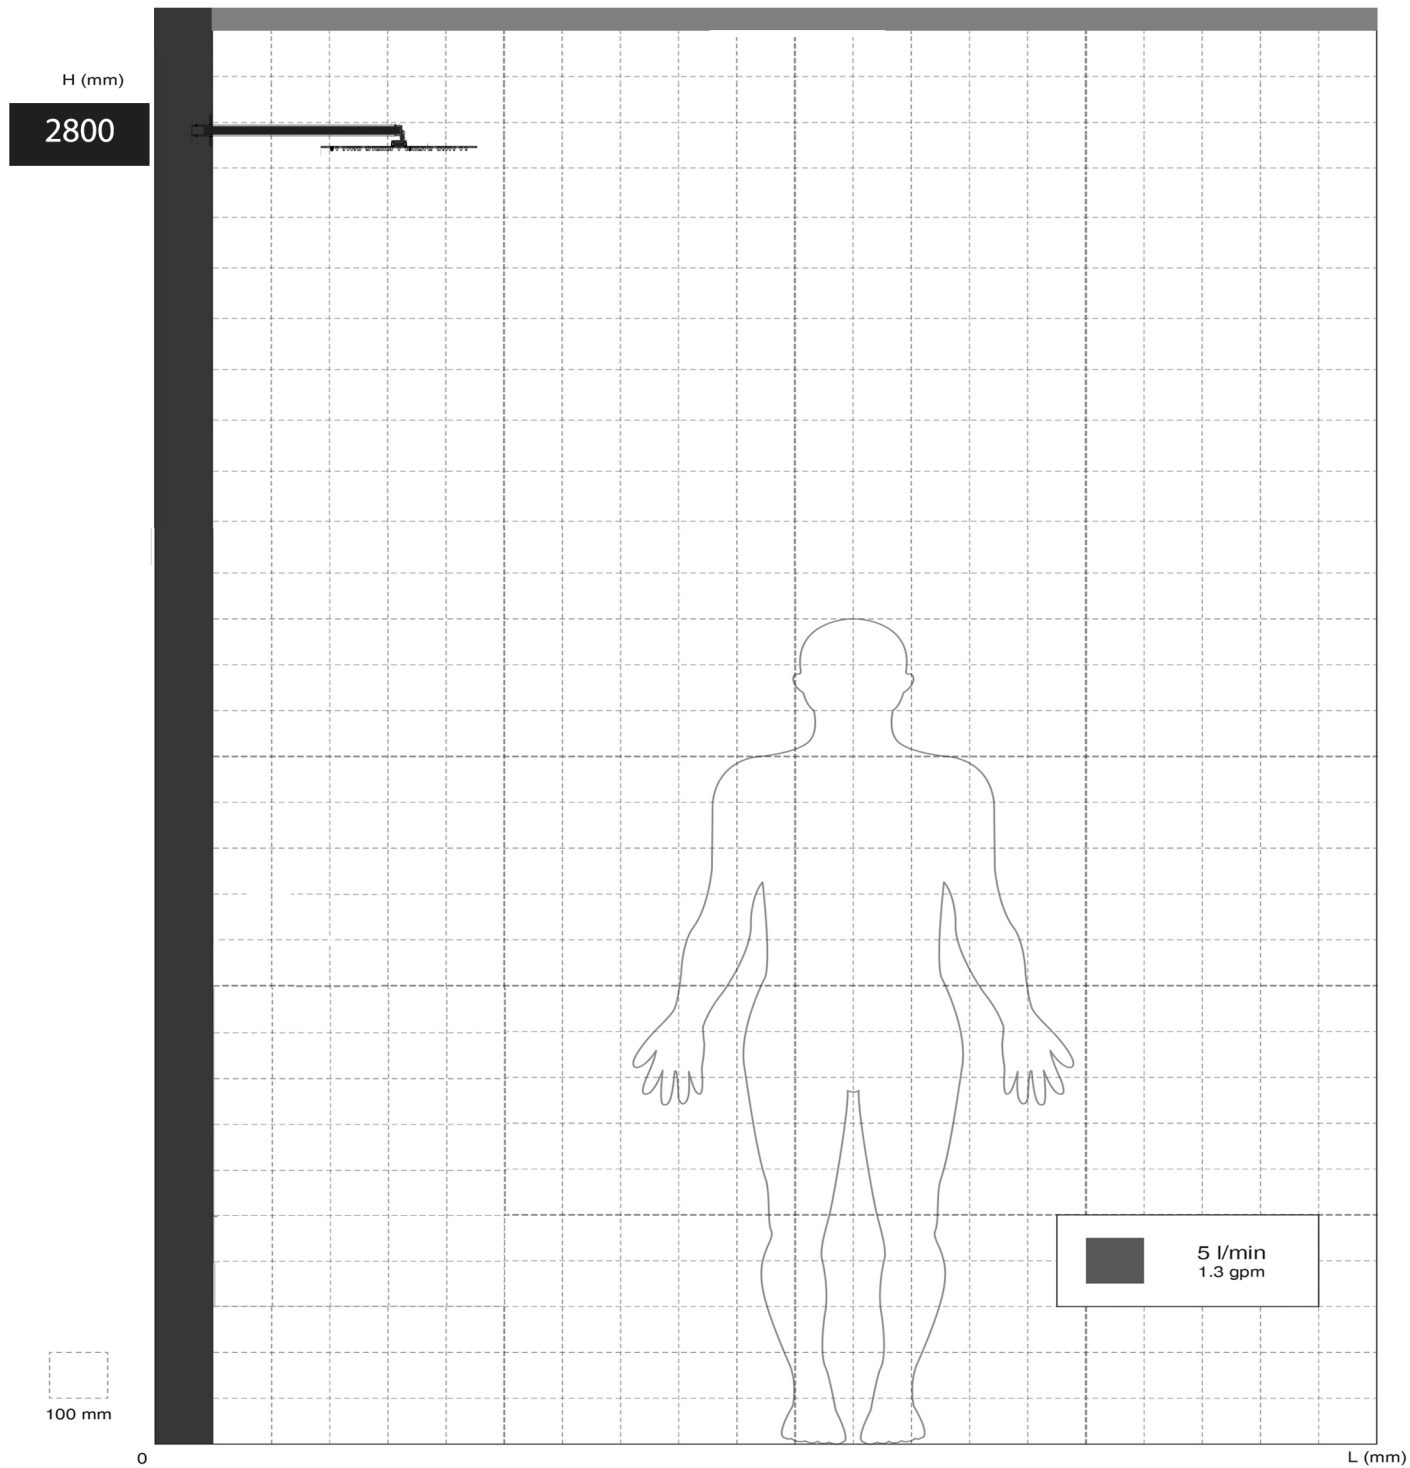

Alm 02

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

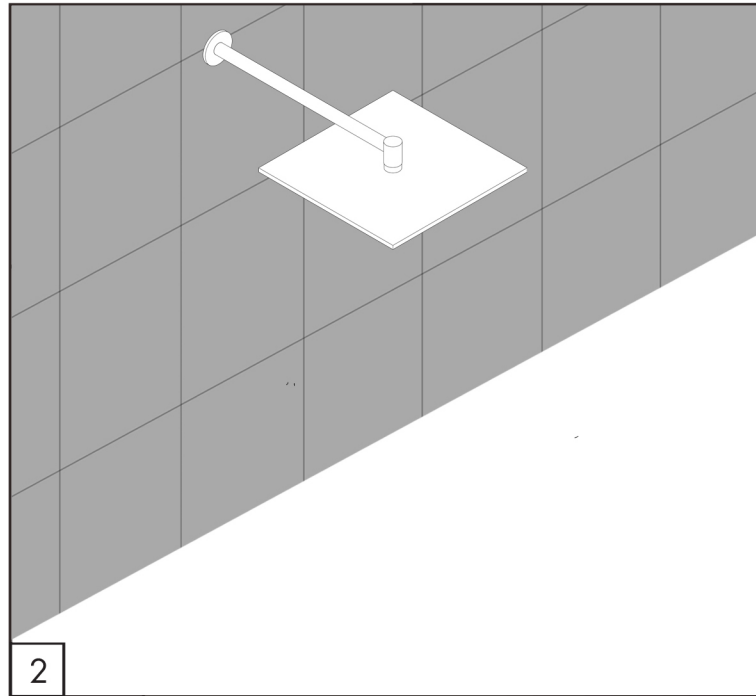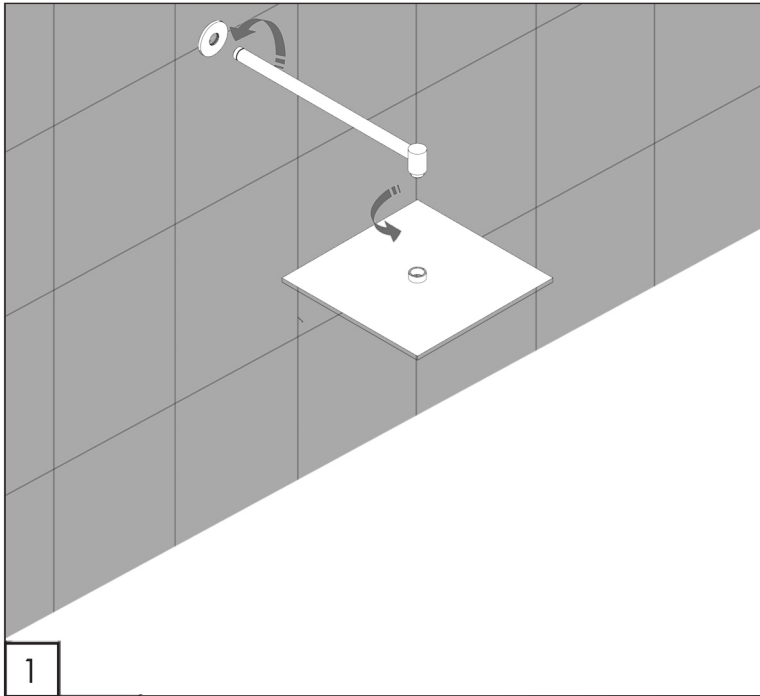

WORKING TEMPERATURE

🌡️ max. 70 °C
max. 158 °F

