


Ma 142




Ma 142
Internal part for toilet mixer

QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving

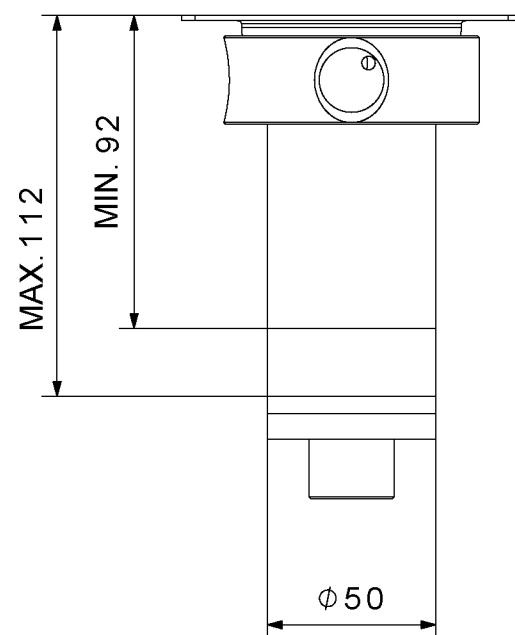

MAINTENANCE





DO NOT USE		cloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

Ma 142

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

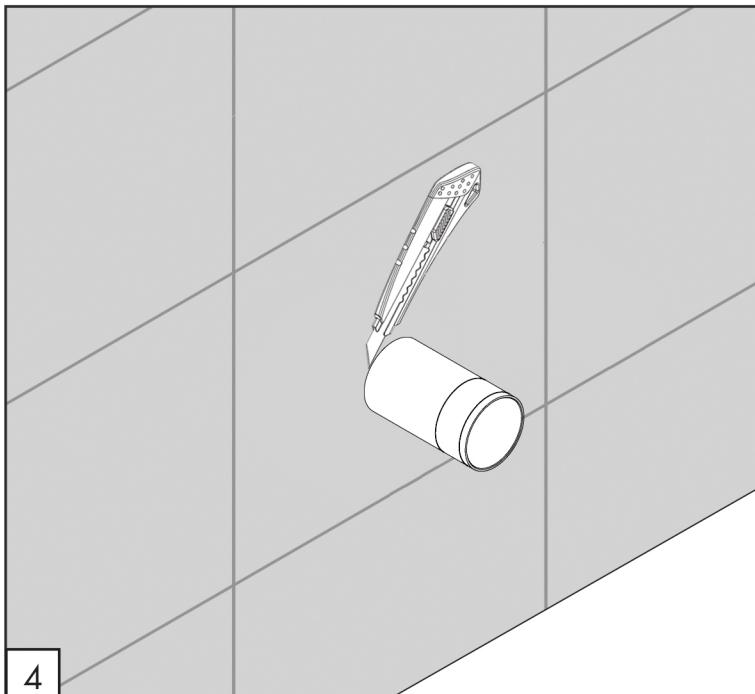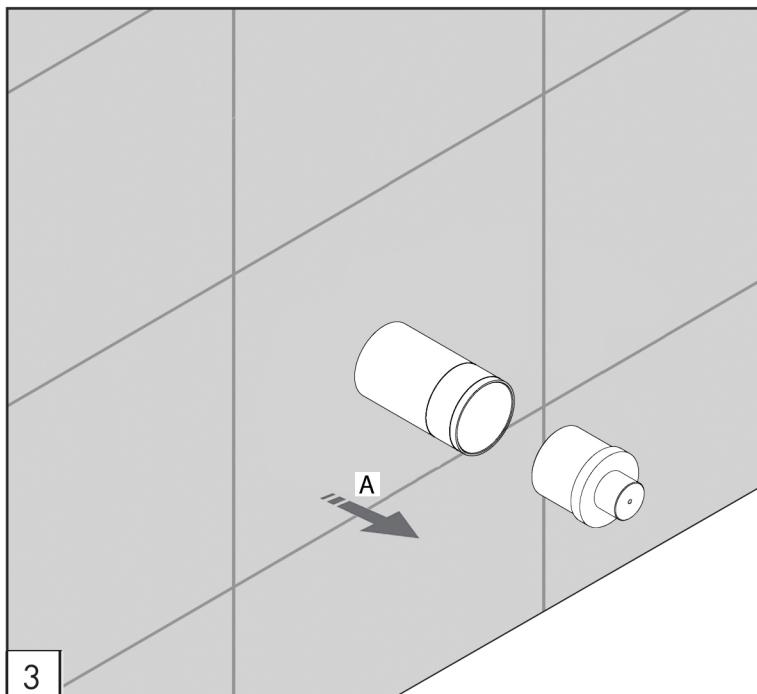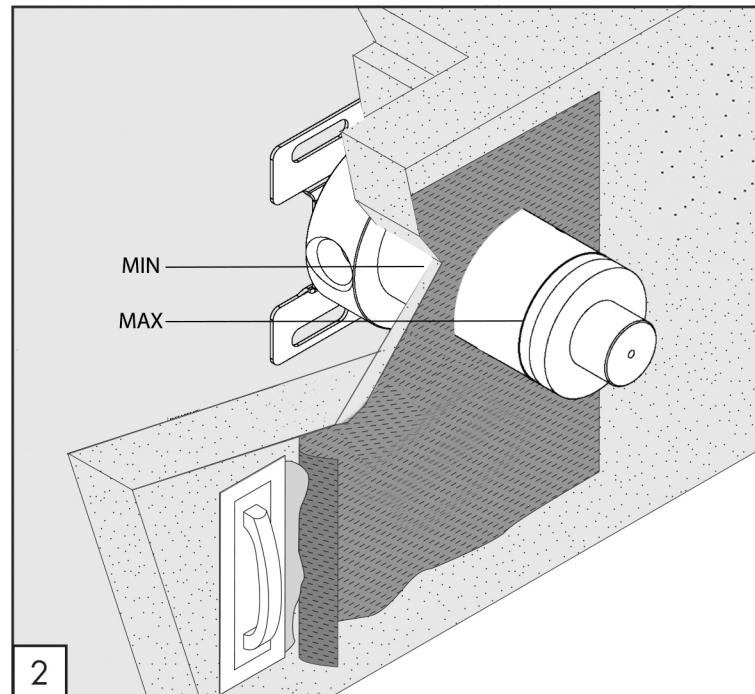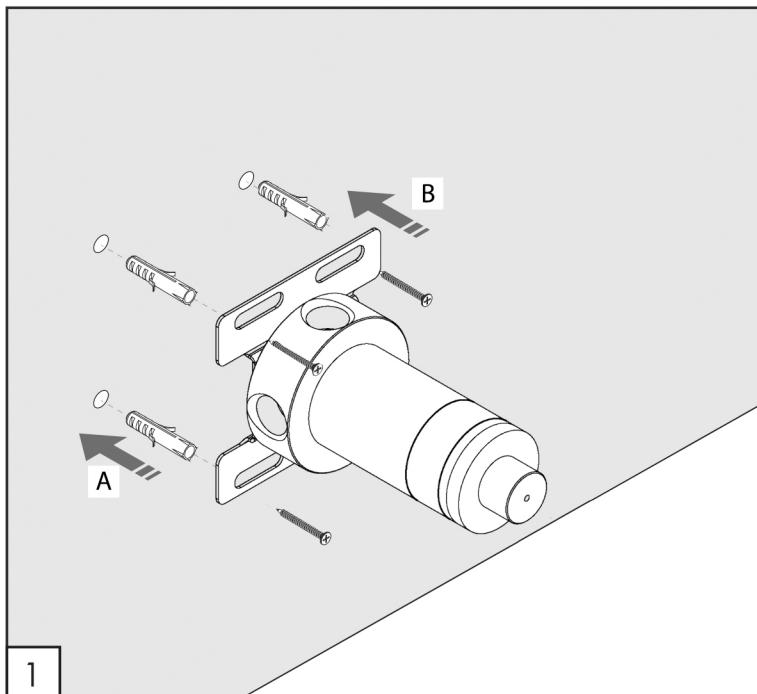

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

qooop