


## Frm 08



**Frm 08**  
Deck mounted control  
QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving






Product that needs built-in part


### MAINTENANCE

DO NOT USE		cloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent



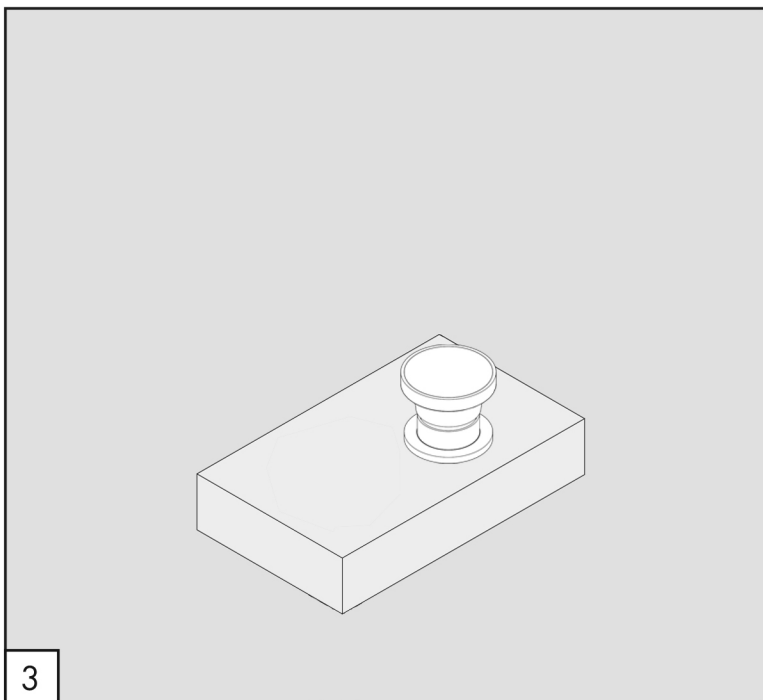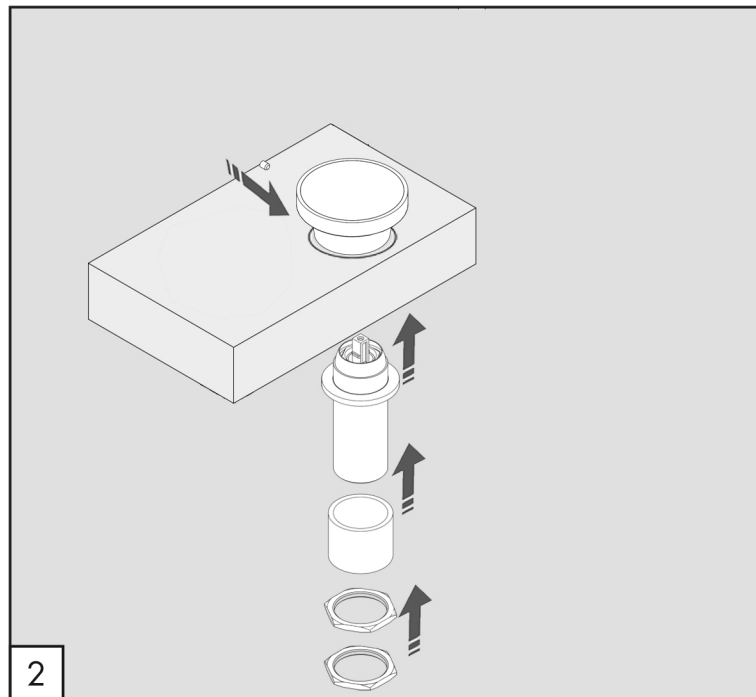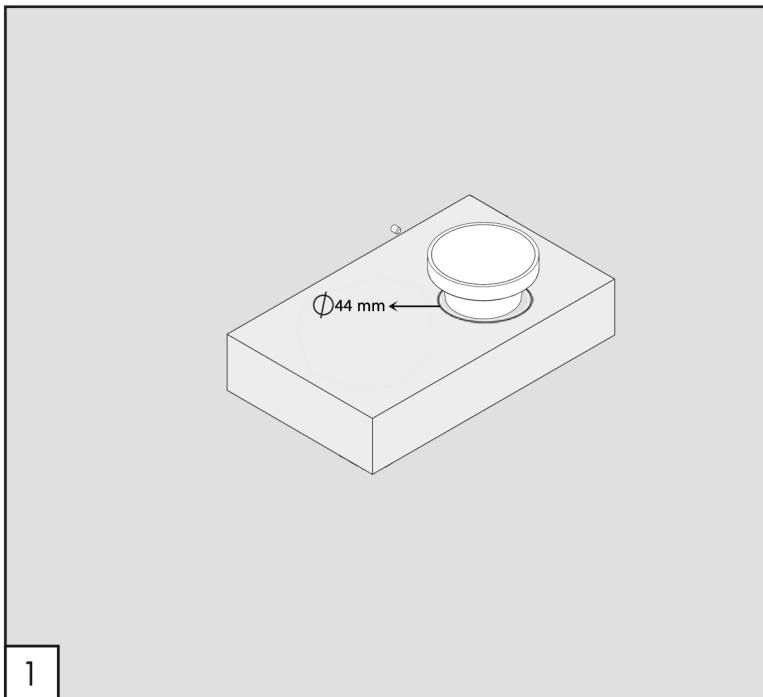

WORKING TEMPERATURE


 max. 70 °C  
 max. 158 °F

