

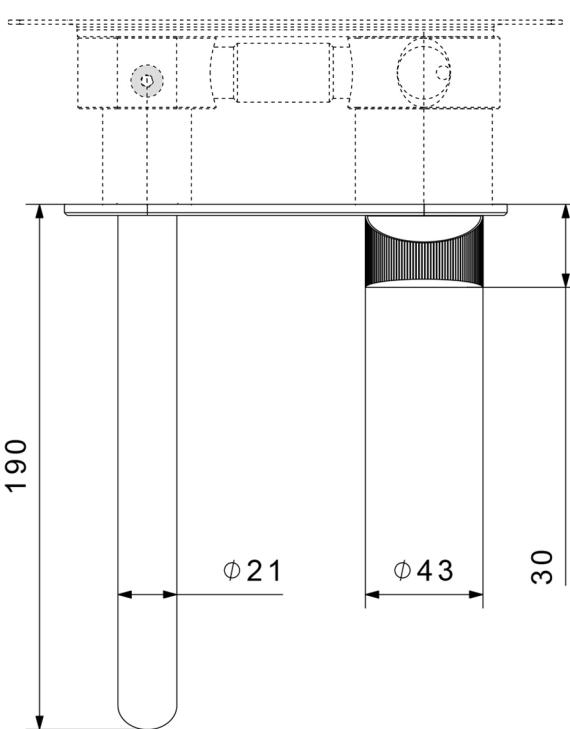


Gnd 06-05

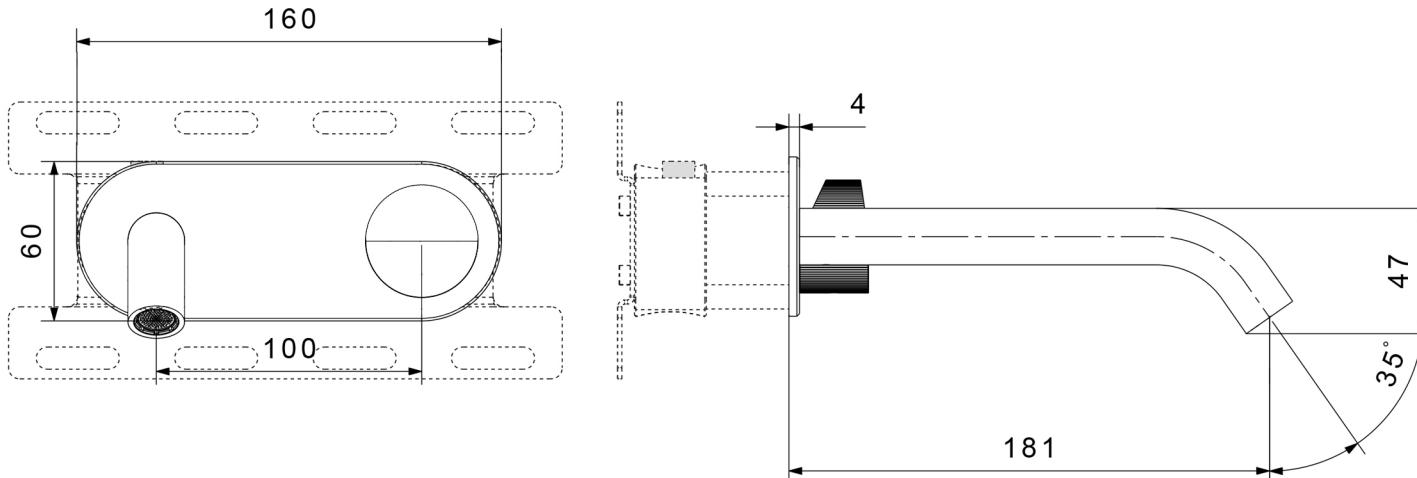

Gnd 06-05

Wall mounted basin mixer

QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving




Product that needs built-in part

MAINTENANCE

DO NOT USE		chloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

Gnd 06-05

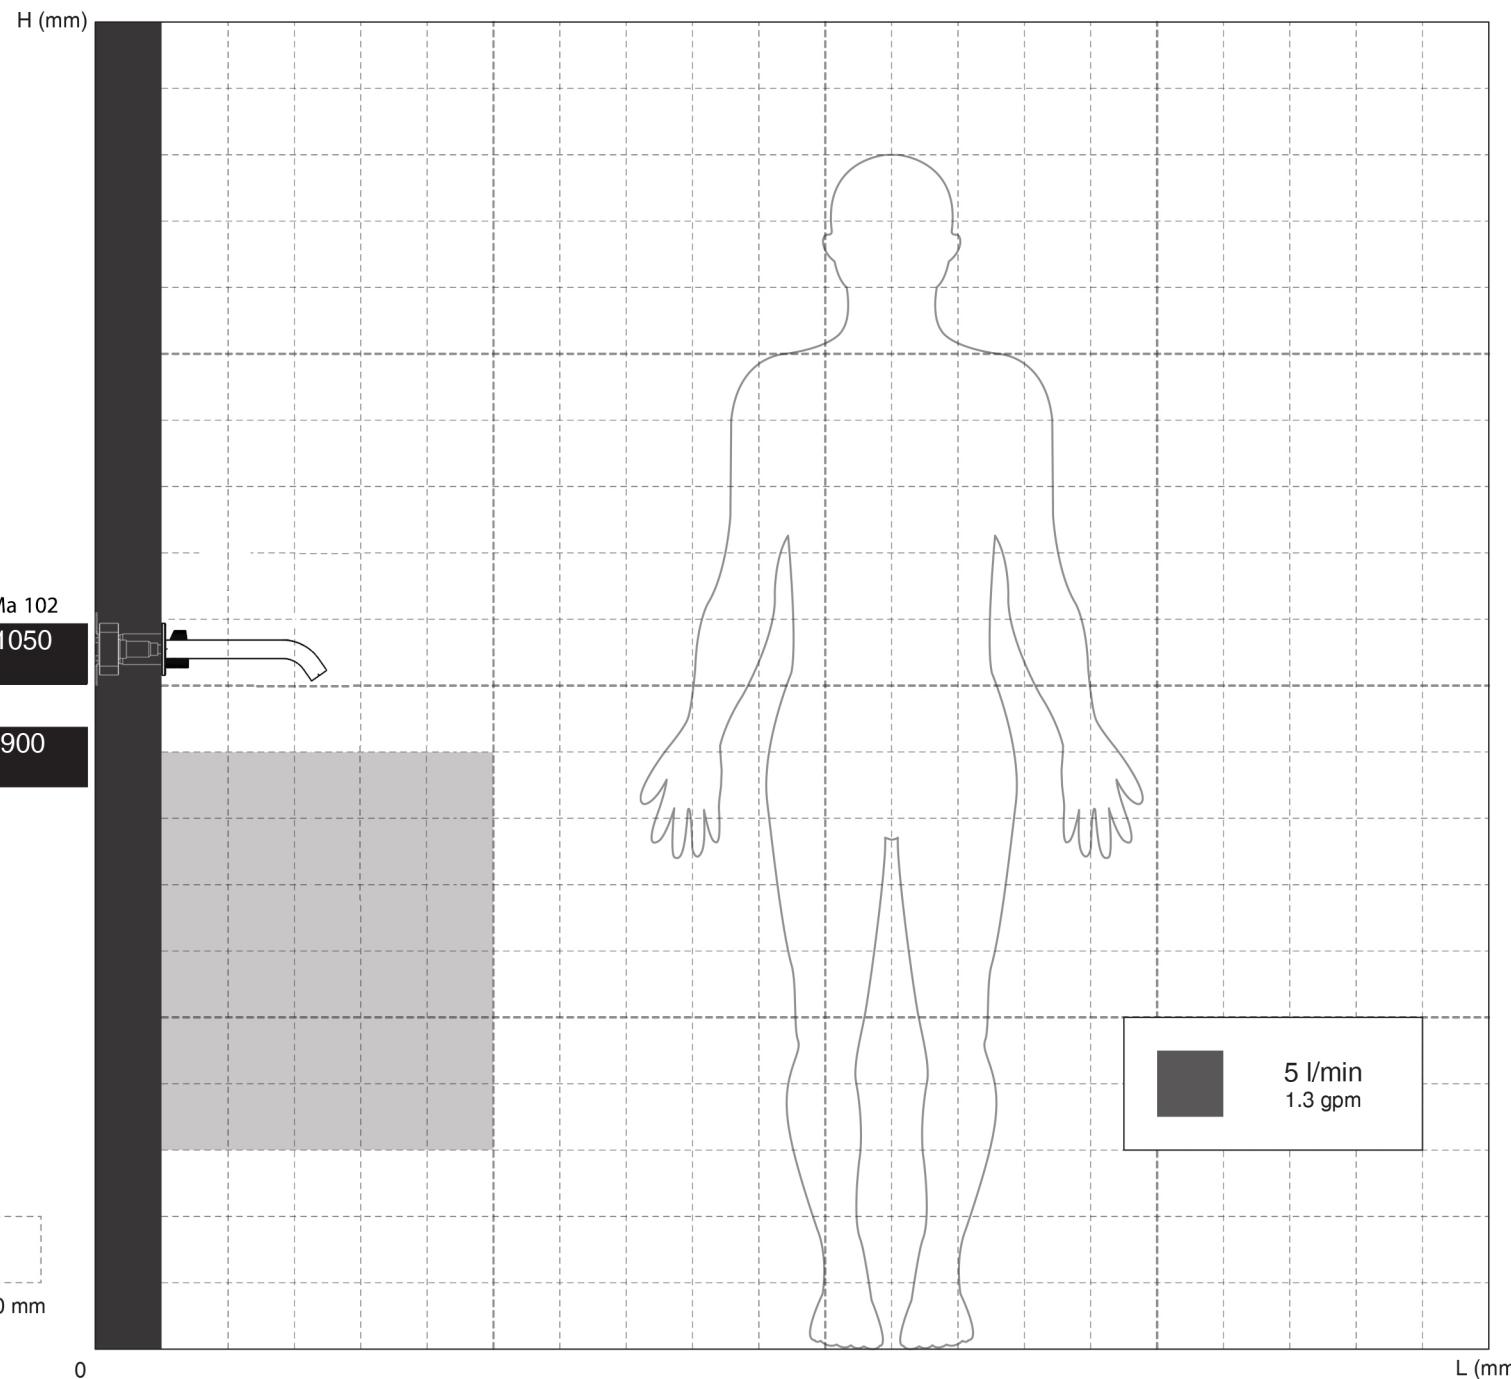

INSTALLATION WARNINGS

Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.

AERATOR INCLUDED







oop

Gnd 06-05

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

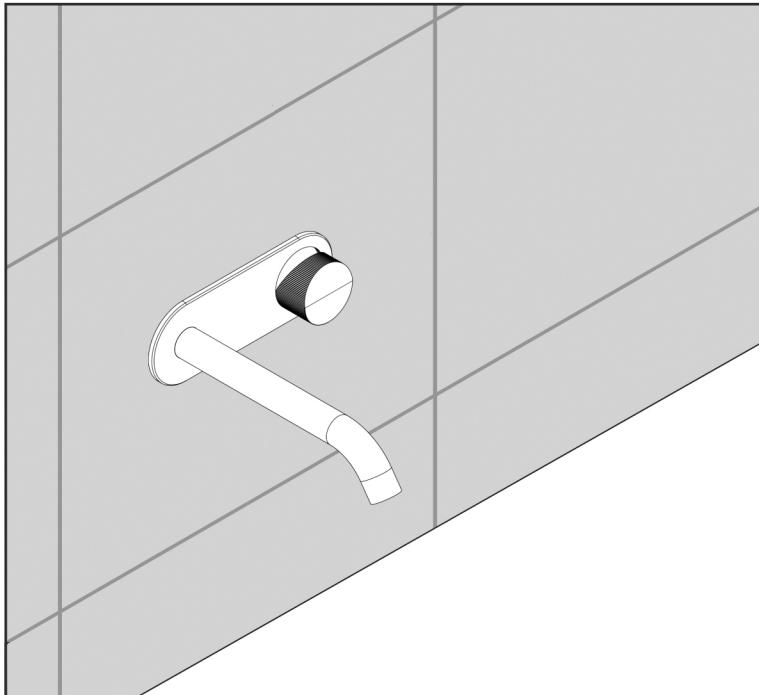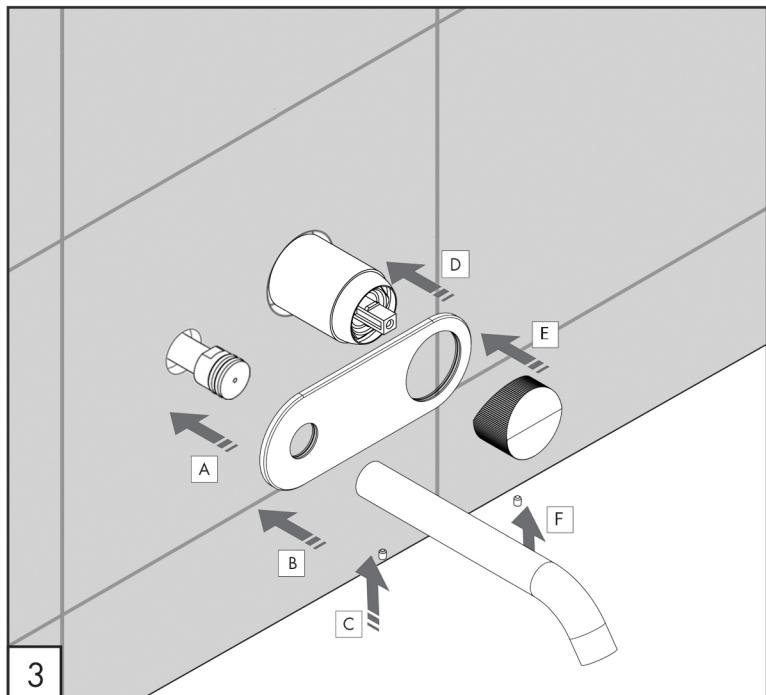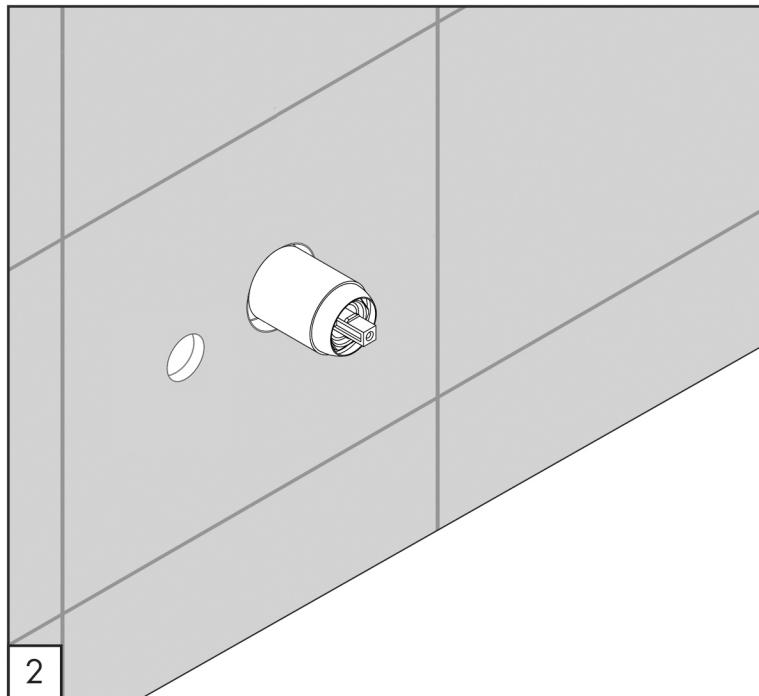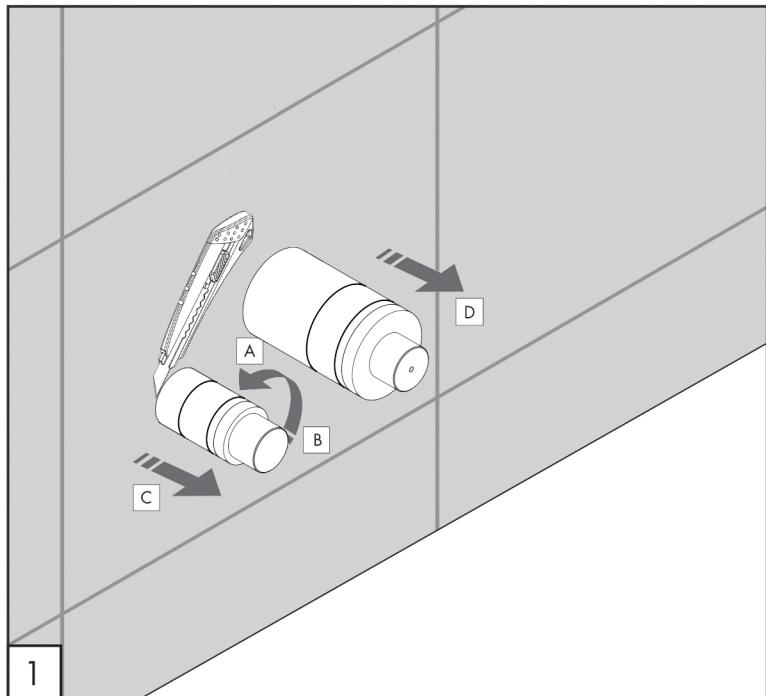

WORKING TEMPERATURE

max. 70 °C
max. 158 °F

qooop