

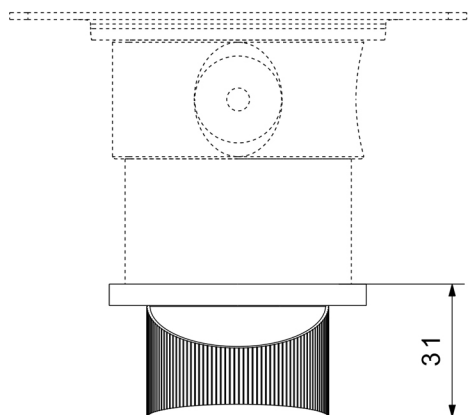
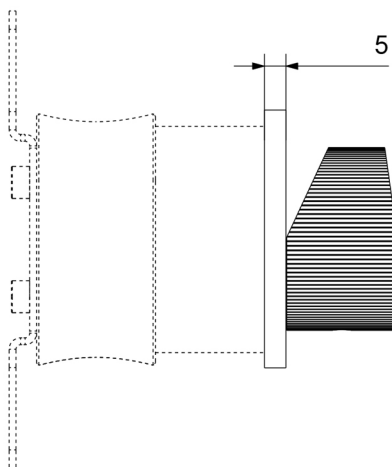


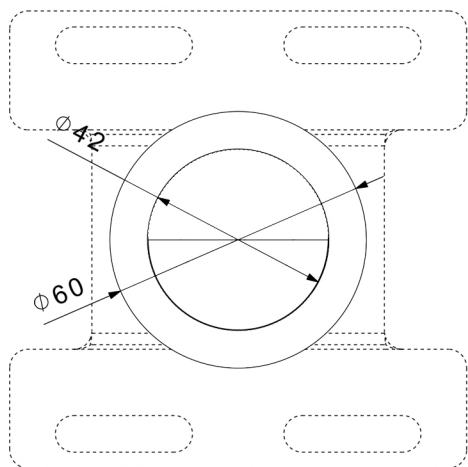

Gnd 07_05



Gnd 07_05
Single lever toilet mixer
QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving



Product that needs built-in part

MAINTENANCE


DO NOT USE		cloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent



Gnd 07_05

INSTALLATION WARNINGS





Each individual product has to be installed and adjusted to suit the user's and the washbasin height.
The representation is purely indicative.

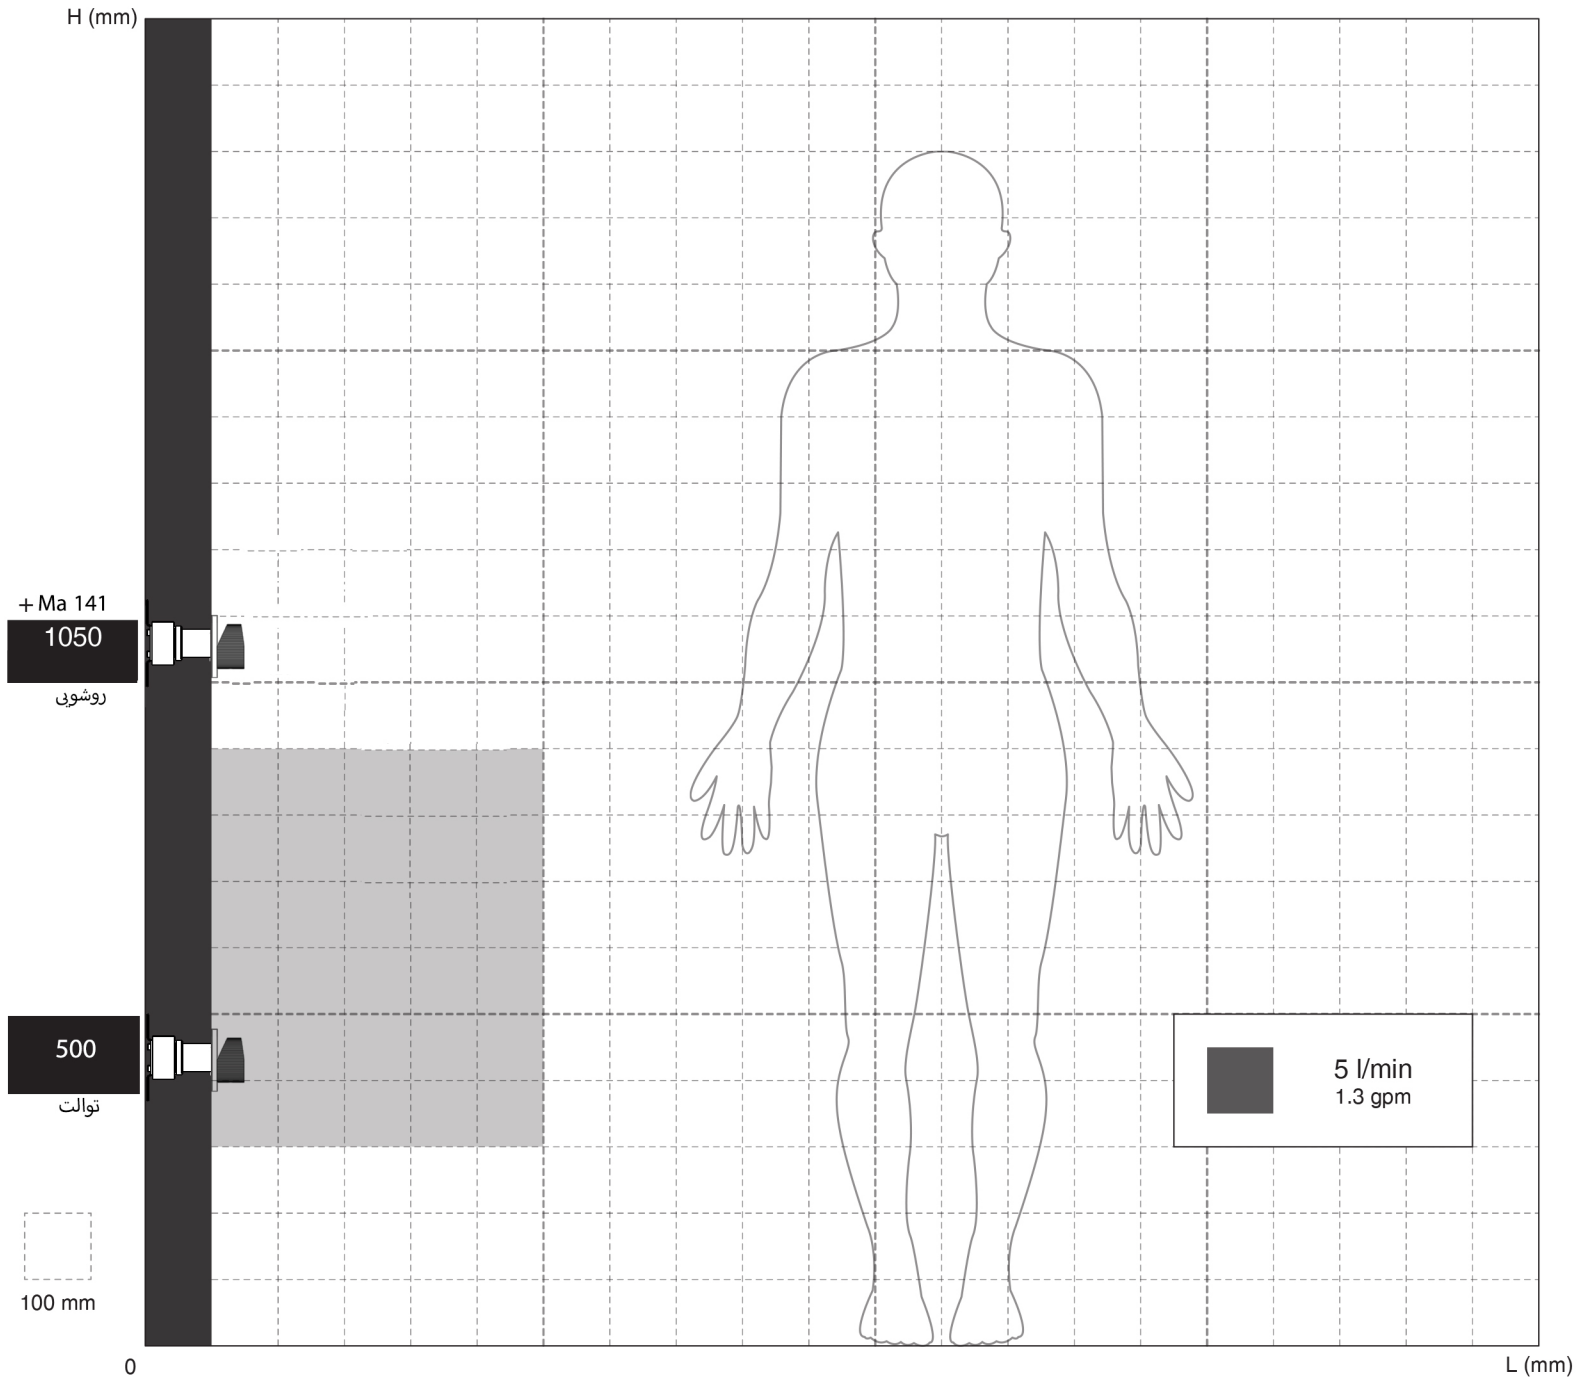

AERATOR INCLUDED

 *Mounted aerator*
5 l/min / 1.3 gpm



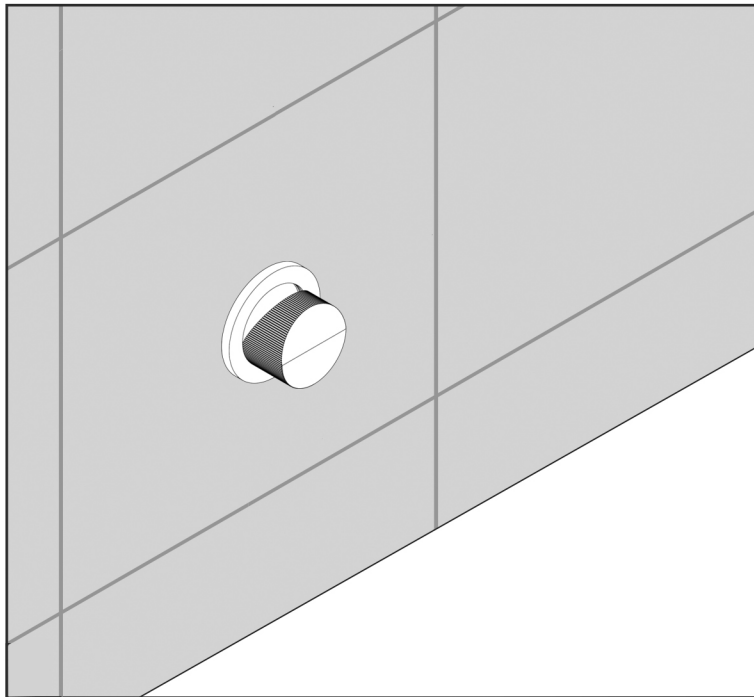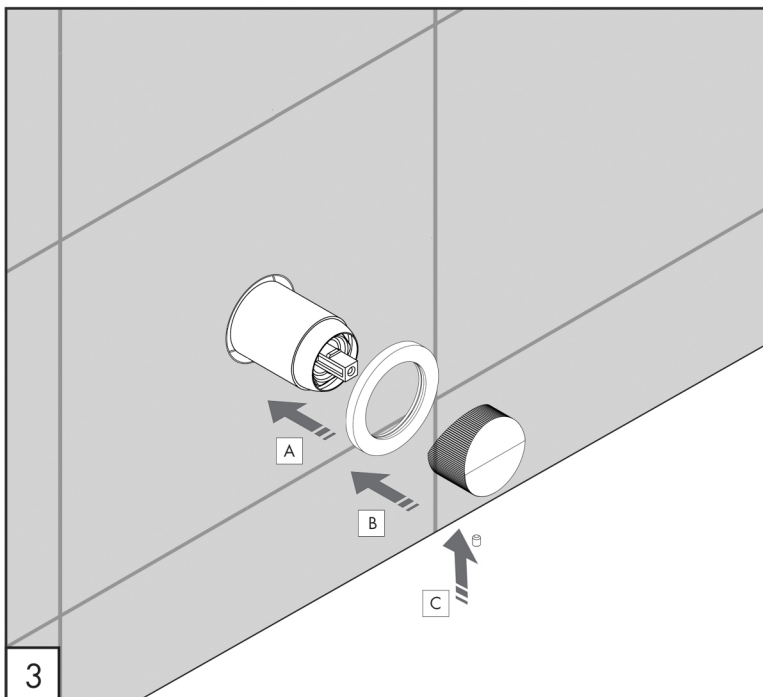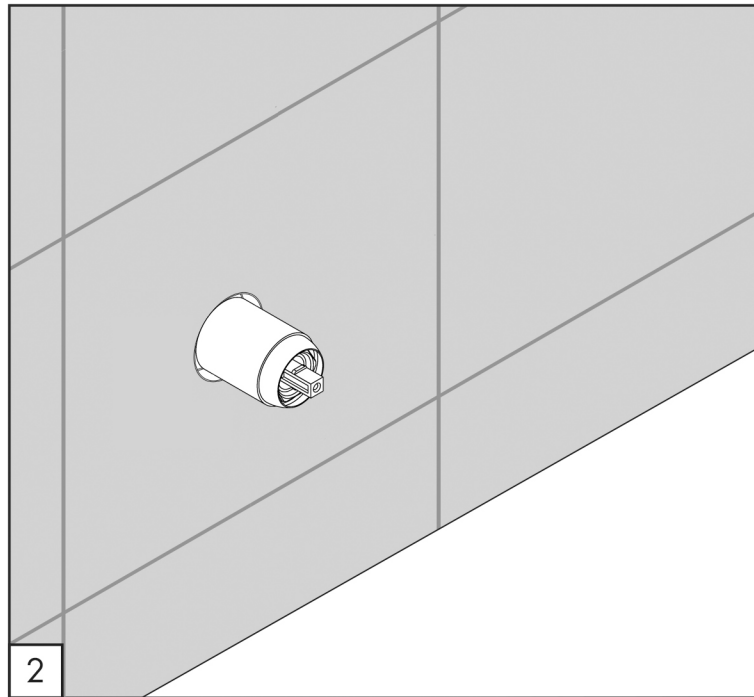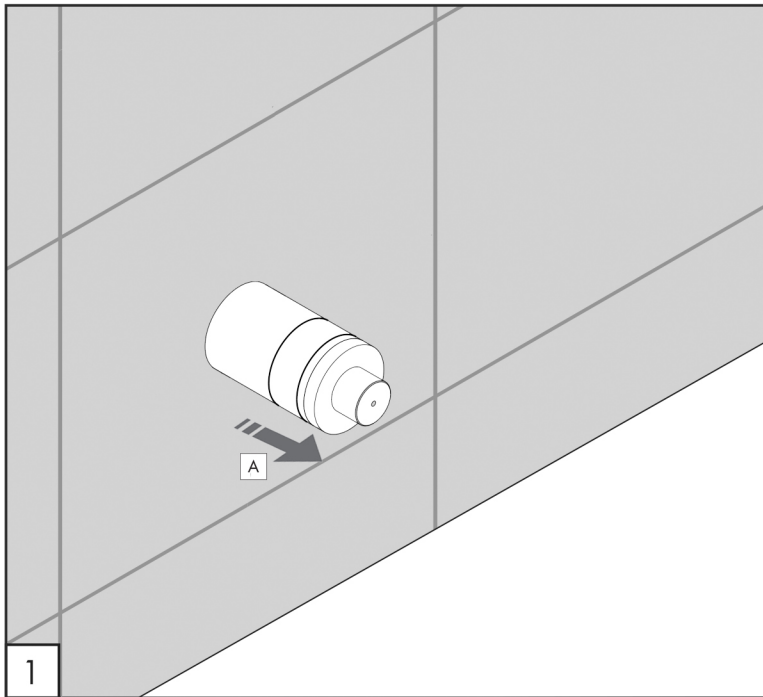

Gnd 07_05

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
 Avoid pressure differences between hot and cold water supply.
 Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

WORKING TEMPERATURE

 max. 70 °C
 max. 158 °F

