


## Ma 143



**Ma 143**  
Internal part for toilet mixer

QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving

### MAINTENANCE





DO NOT USE		cloric and muriatic acid hydrofluoric acid chlorine bleach
TO USE		neutral pH detergent

qoop

# Ma 143

## TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.  
Avoid pressure differences between hot and cold water supply.  
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

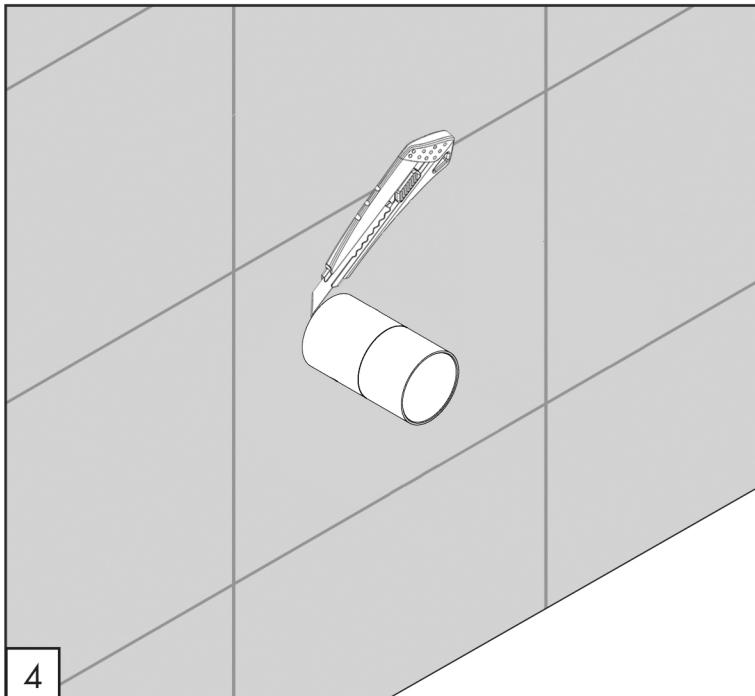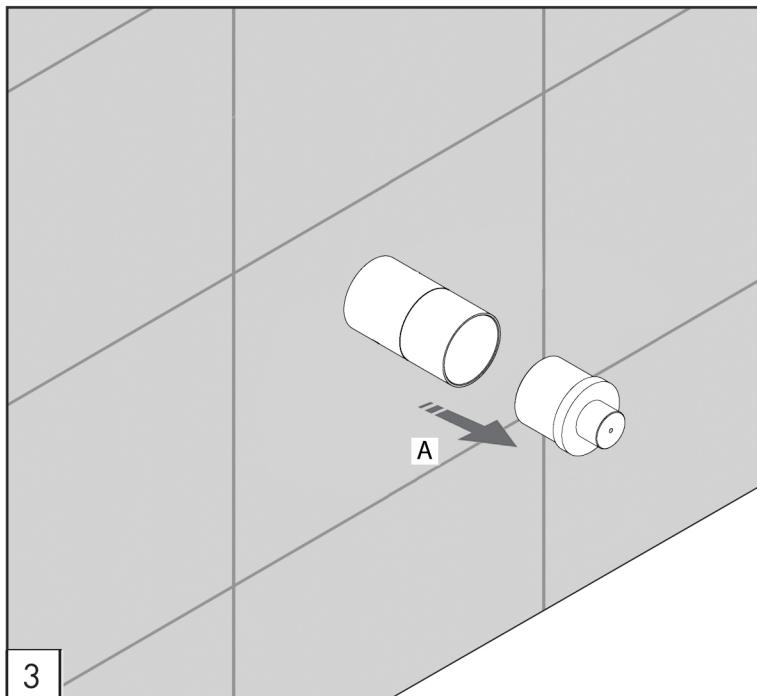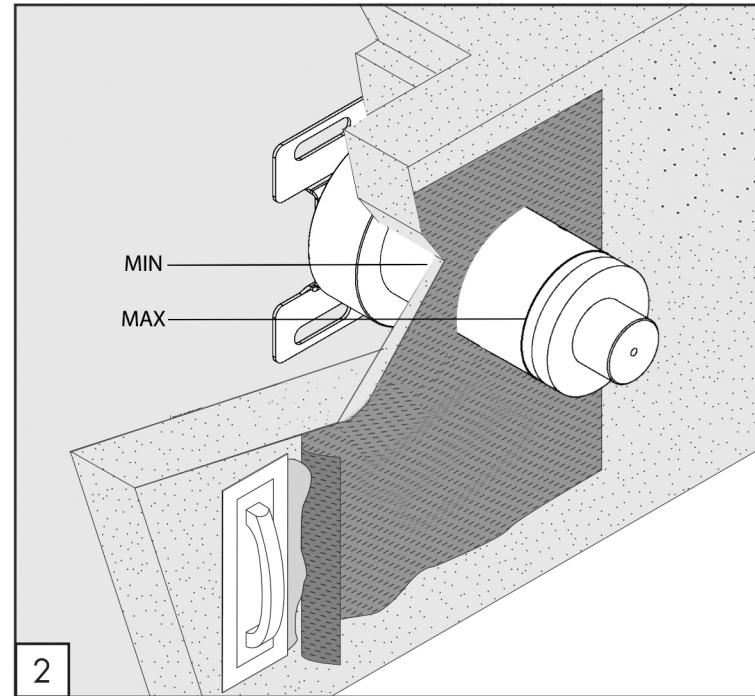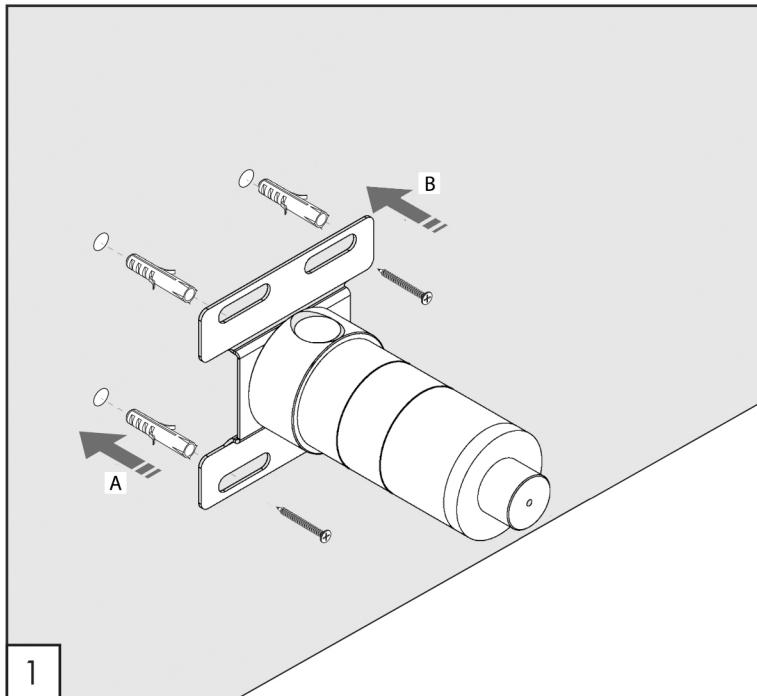

## WORKING TEMPERATURE

max. 70 °C  
max. 158 °F

qooop