


# Gvr 08



**Gvr 08**  
Deck mounted control  
QOOP

Stainless steel 316L



Flow rate aerator 5 l/min / 1.3 gpm, water saving






Product that needs built-in part

## MAINTENANCE


DO NOT USE		cloric and muriatic acid
		hydrofluoric acid
		chlorine bleach
TO USE		neutral pH detergent



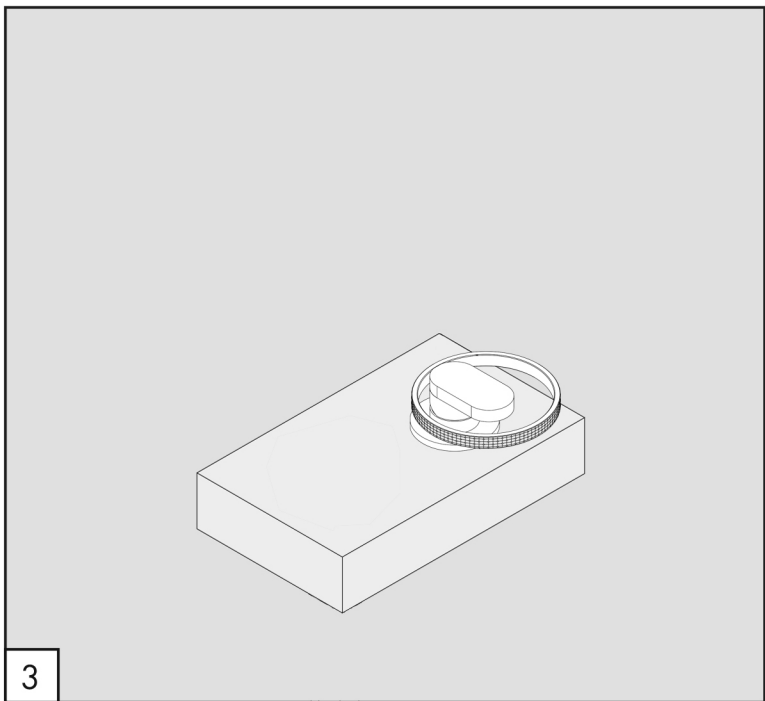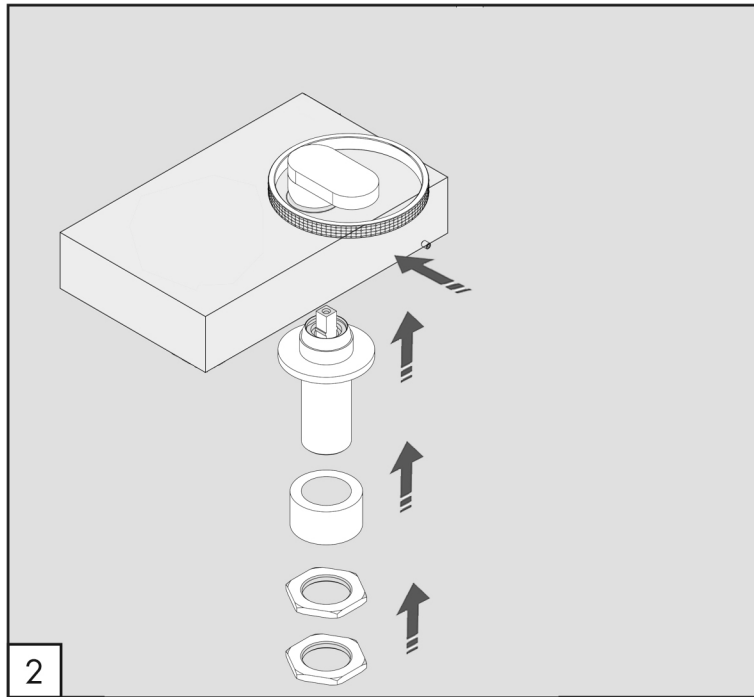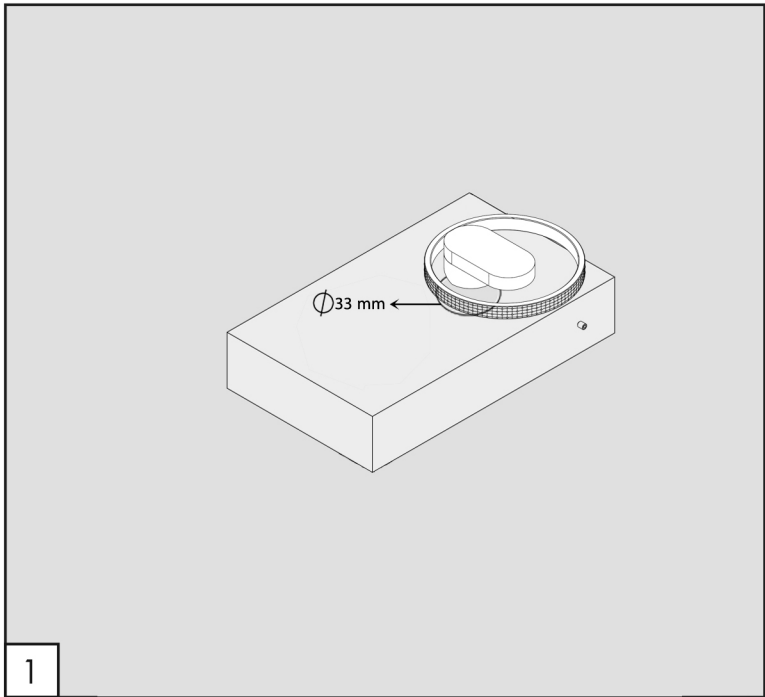

# Gvr 08

WORKING TEMPERATURE

 max. 70 °C  
max. 158 °F

